



PUMPER BODY Long Aluminum 2nd Gen Pumper CHASSIS Saber FR Chassis	
CHASSIS AXLE, FRONT, CUSTOM DANA, D-2000F, 20,000 LB AXLE, REAR 27,000 Lb Dana Axle ENGINE 450 HP Cummins L9 Engine TRANSMISSION Allison 6th Gen, 3000 EVS P BUMPER 19" Extended Steel Painted CAB 7010 Saber FR Cab	
BODY WATER TANK 1000 Gallon New York Style Water Tank COMPT, PUMPER, REAR 23.50" FF RollUp Rear Compt COMPT, PUMPER, LEFT SIDE 171" RollUp Full Height & Depth, Front & Rear Cleveland Notch 12" COMPT, PUMPER, RIGHT SIDE 171" RollUp Full Height & Depth, Front & Rear Cleveland Notch 12"	
FIRE SUPPRESSION PUMPHOUSE 45" Control Zone Side Mount PUMP 1500 GPM Waterous CSU CROSSLAYS, 1.50" (2) 1.50" Standard Capacity CROSSLAYS, 2.50" 2.50" Crosslay Not Required SPEEDLAYS Speedlays Not Required GENERATOR Generator Not Required Foam System Husky 3 Single Agent Foam System Foam Cell 20 Gallon Foam Cell, Not Reduced Water	
NOTE DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.	

1. ONE 1.50 OUTLET WITH 2.00 PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
2. SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
3. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
4. BATTERY CHARGER LOCATED IN COMPARTMENT PER SHOP ORDER
5. BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE THROUGH WINDOW
6. SIX ADJUSTABLE SHELVES IN COMPARTMENTS PER SHOP ORDER
7. PLUMBING FOR FUTRUE HUSKY FOAM SYSTEM

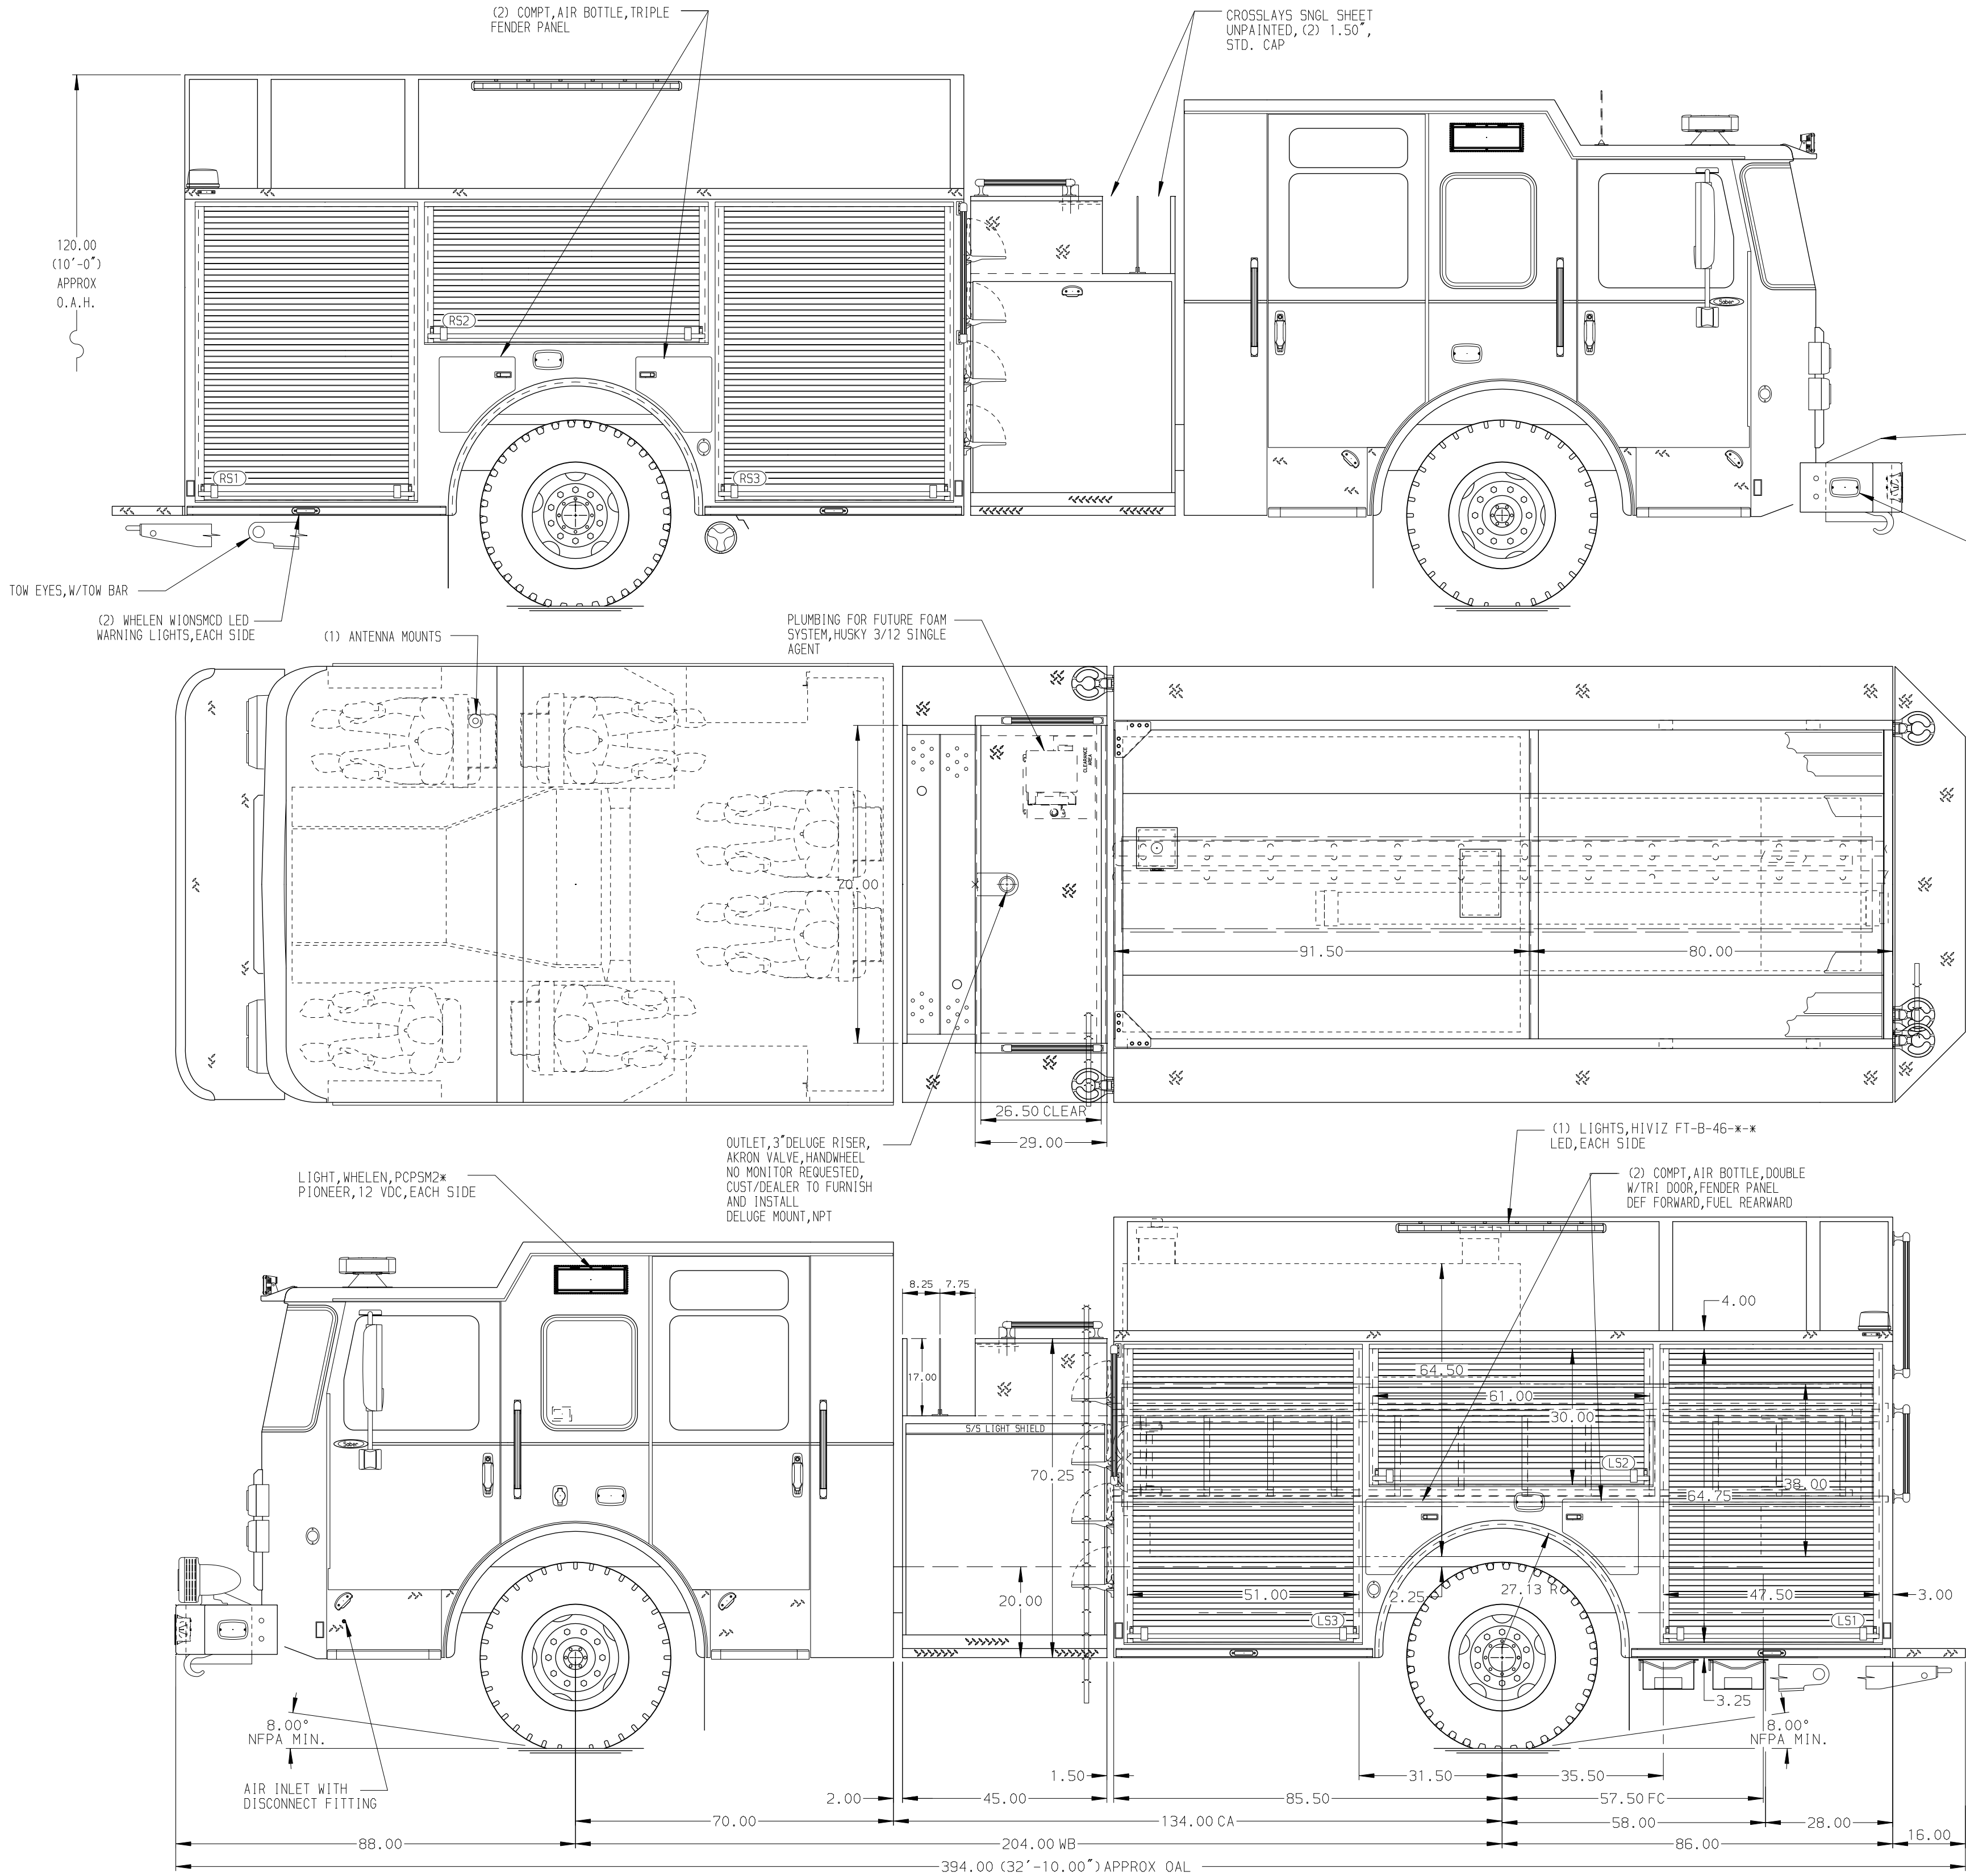

HOSEBED CAPACITY	
BED 1	400' OF 3.00" D.J. POLY HOSE
BED 2	1000' OF 5.00" D.J. POLY HOSE

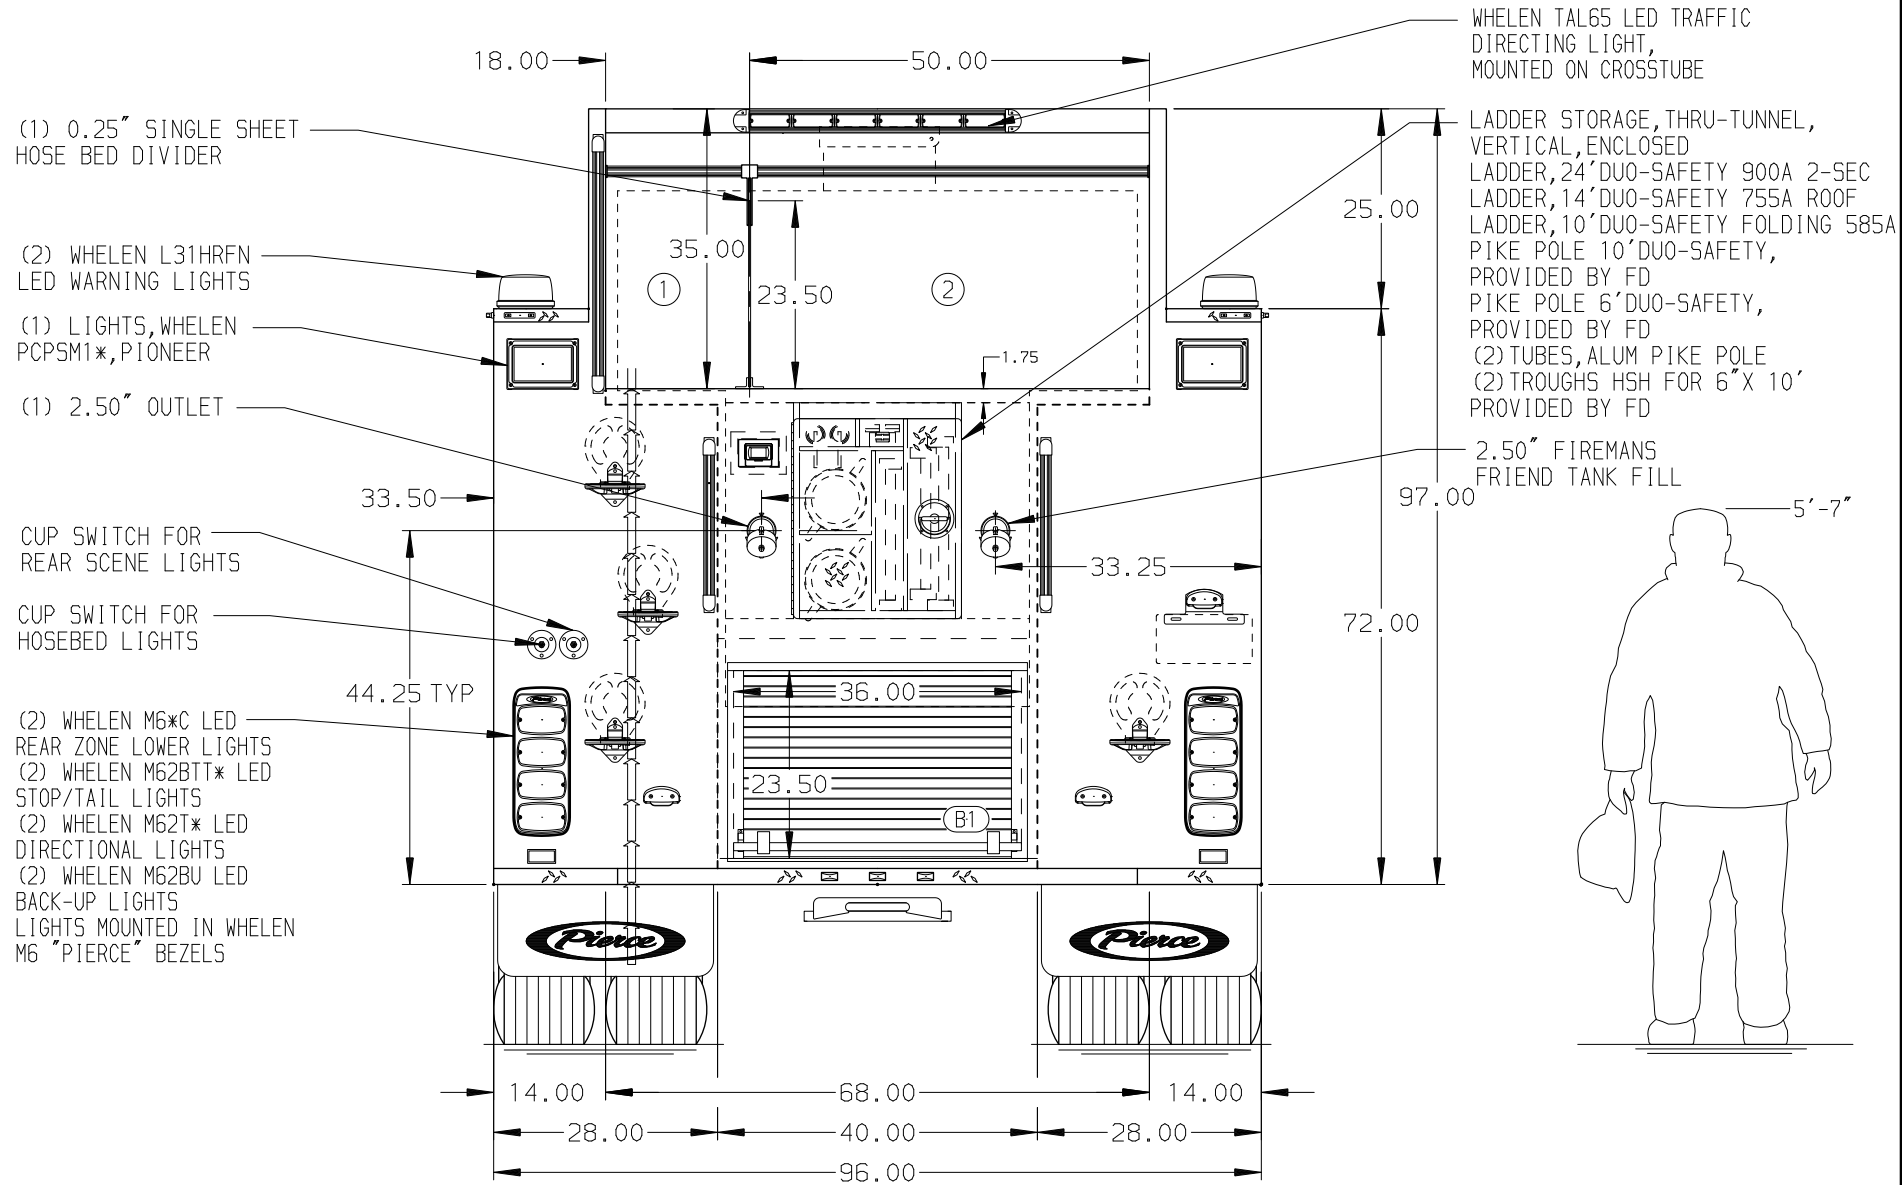

MANUFACTURING INC.

TITLE Pierce Pumper Approval Drawing
FOR Pierce Field Unit
Bradenton, Florida

DWG NO. 41146AD

JOB NO.	41146
SCALE	DATE
1:24	
DRAWN BY	07AUG23
RWR	
CHECKED BY	07AUG23
JAP	
SHEET SIZE	SHEET NO.
D	1 OF 1

				CHASSIS DATA	TITLE
				MAKE	FOR
				PIERCE	
				MODEL	DWG NO.
				SABER FR	
14NOV23	RWR	JAP			
REV	DATE	BY	CH		