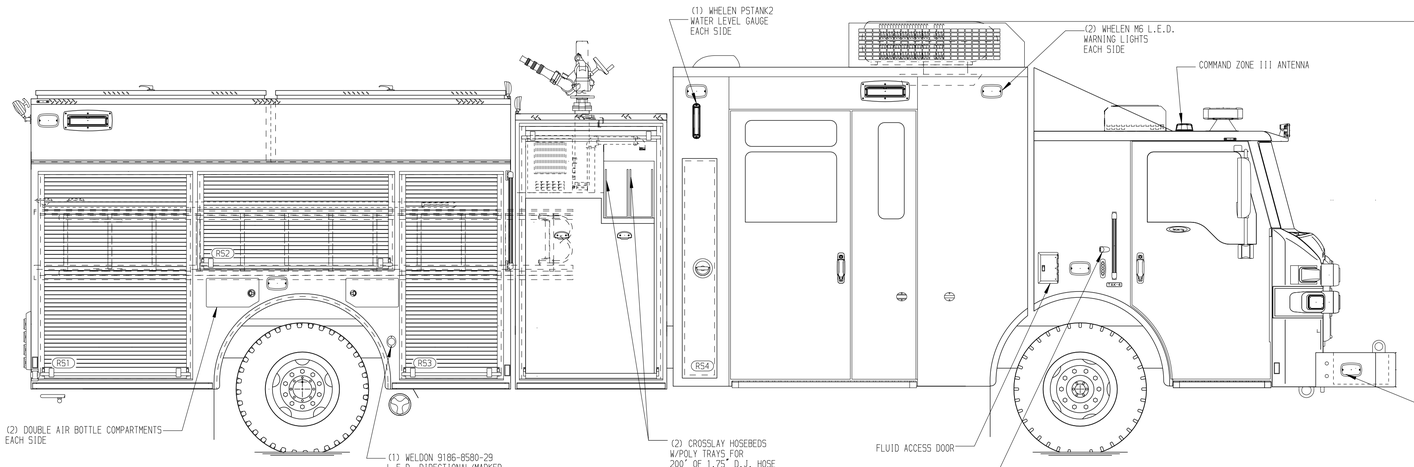

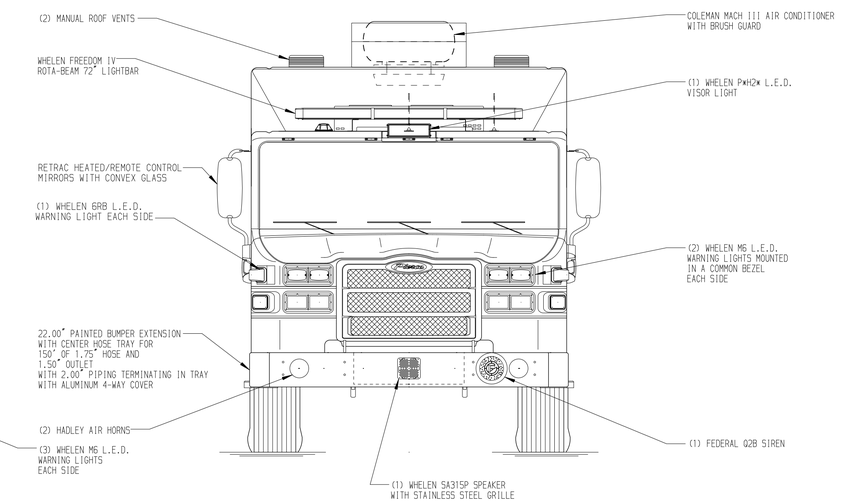

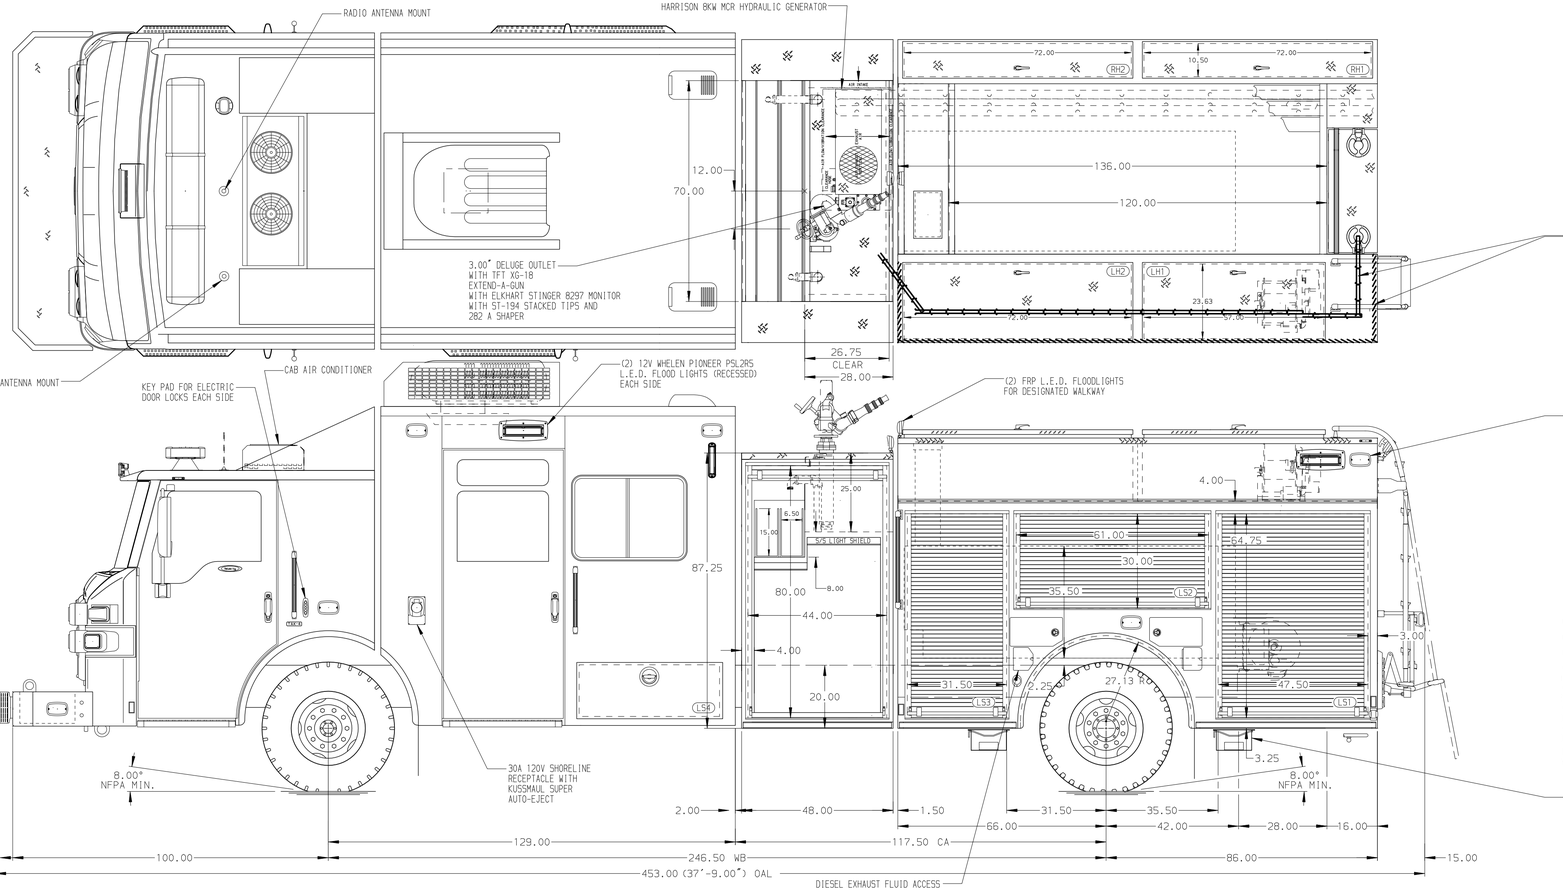

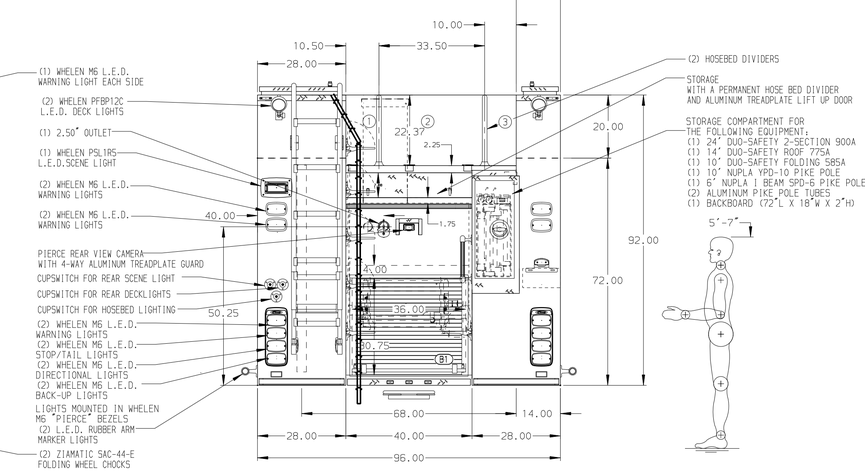

HOSEBED CAPACITIES

1. 200' OF 2.50" D.J. POLY HOSE
2. 800' OF 5.00" LDH HOSE
3. 400' OF 2.50" D.J. POLY HOSE

ALUMINUM BODY

FRONTAL IMPACT PROTECTION

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

PIERCE MANUFACTURING INC.

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET WITH DISCONNECT COUPLING ON D.S. STEPWELL
2. INTERLUBE LUBE SYSTEM PUMP LOCATED PER SHOP ORDER
3. BATTERY CHARGER LOCATED PER SHOP ORDER
4. BATTERY CHARGER INDICATOR LOCATED PER SHOP ORDER
5. SEVEN L-SHAPE S/S DRIP PAN GUARDS LOCATED PER SHOP ORDER
6. EIGHT PULL STRAPS FOR DOORS W/ HOOK AND LOOP LOCATED PER SHOP ORDER
7. SEVEN FULL WIDTH/ DEPTH ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
8. ONE FLOOR MOUNTED SLIDE-OUT TRAY LOCATED PER SHOP ORDER
9. ONE SWINGOUT ALUMINUM TOOLBOARD LOCATED PER SHOP ORDER
10. ONE L-SHAPER PARTITION LOCATED PER SHOP ORDER
11. FOUR SCBA ZICO BRACKETS LOCATED PER SHOP ORDER
12. ONE SLIDE-OUT BRACKET W/ ROLLER GUIDES ATTACHED LOCATED PER SHOP ORDER
13. TWO VERTICAL DIVIDERS LOCATED PER SHOP ORDER
14. ONE PAC TRAC INSTALLED ON THE BACK WALL PER SHOP ORDER
15. ONE PAC TRAC INSTALLED ON THE BACK AND SIDE WALLS PER SHOP ORDER
16. HANNAY MODEL SBEF4130-17-18 BOOSTER REEL WITH 150' OF 0.75" LIGHT WEIGHT HOSE IN B1
17. NORCOLD REFRIGERATOR LOCATED PER SHOP ORDER
18. ONE HANNAY ELECTRIC REWIND CORD REEL MODEL 1618-17-18 WITH 200' OF 12/3 CABLE IN LH1
19. SEVEN NEMA DUPLEX RECEPTACLES LOCATED PER SHOP ORDER
20. CIRCUIT BREAKER LOCATED PER SHOP ORDER

REV	DATE	BY	CH	
▽	-	-	-	MODEL
				VELOCITY

CHASSIS DATA

MAKE

PIERCE

TITLE: 1500-D-500 GAL POLY, 152" BODY
LDRS. BTWN. TANK & S. SHEET, (2) X-LAYS, DELUGE

FOR: OGDEN CITY CORPORATION
OGDEN, UTAH

DWG NO. 37303AD

JOB NO.	37303
SCALE	1:24
DATE	
DRAWN BY	LST 06APR22
CHECKED BY	NPE 19APR22
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 19-APR-2022 13:15:08