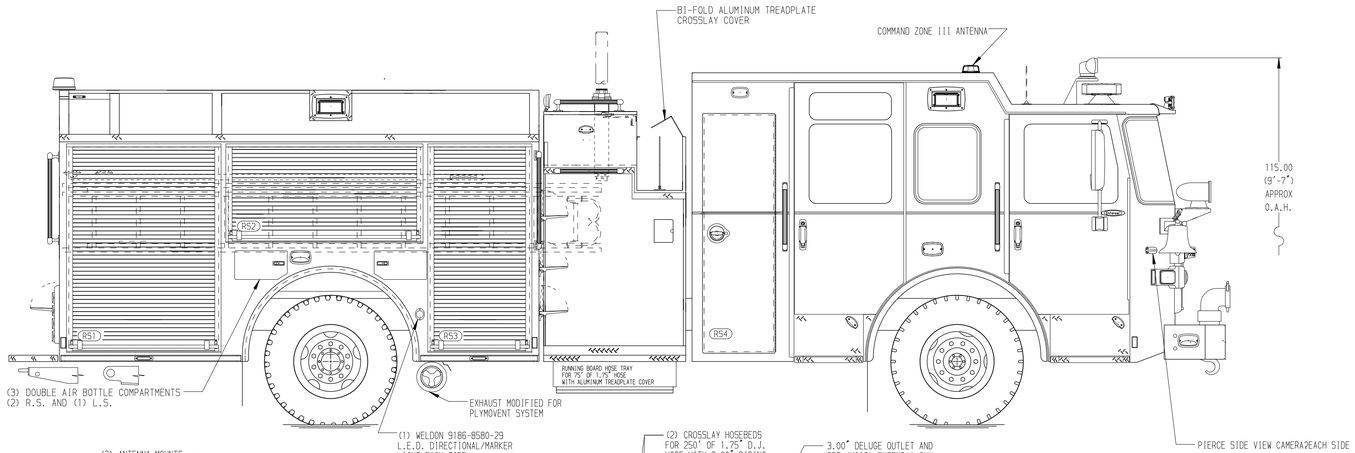

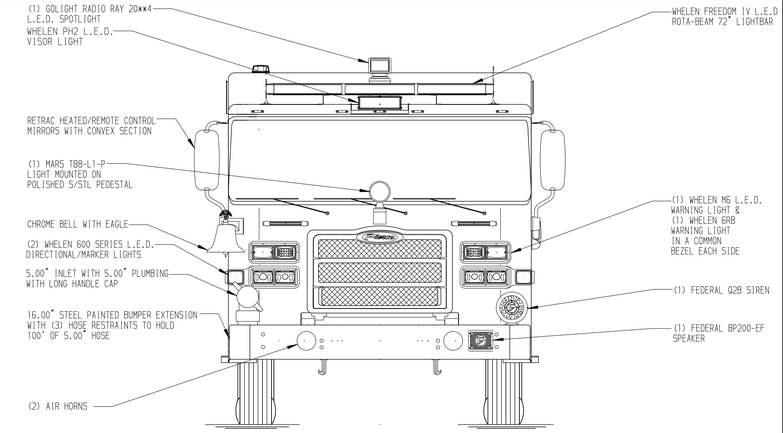

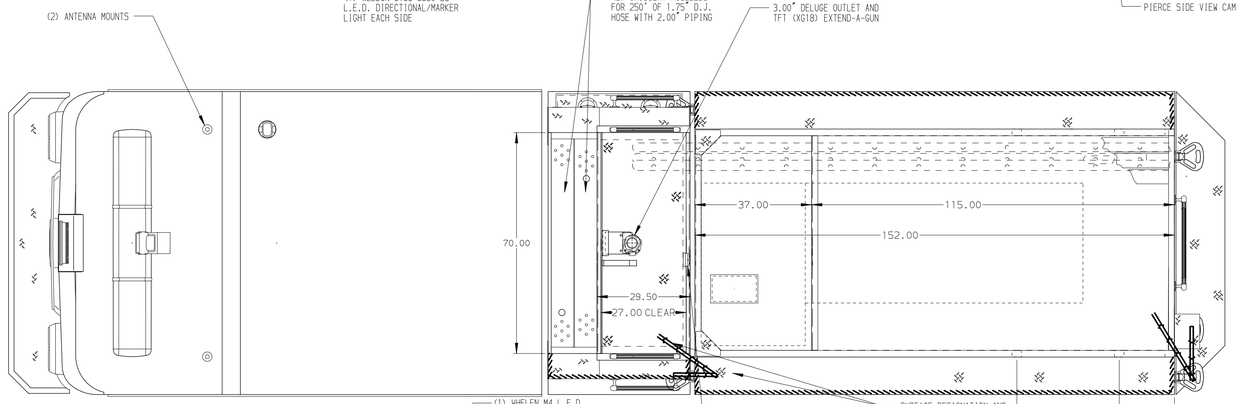

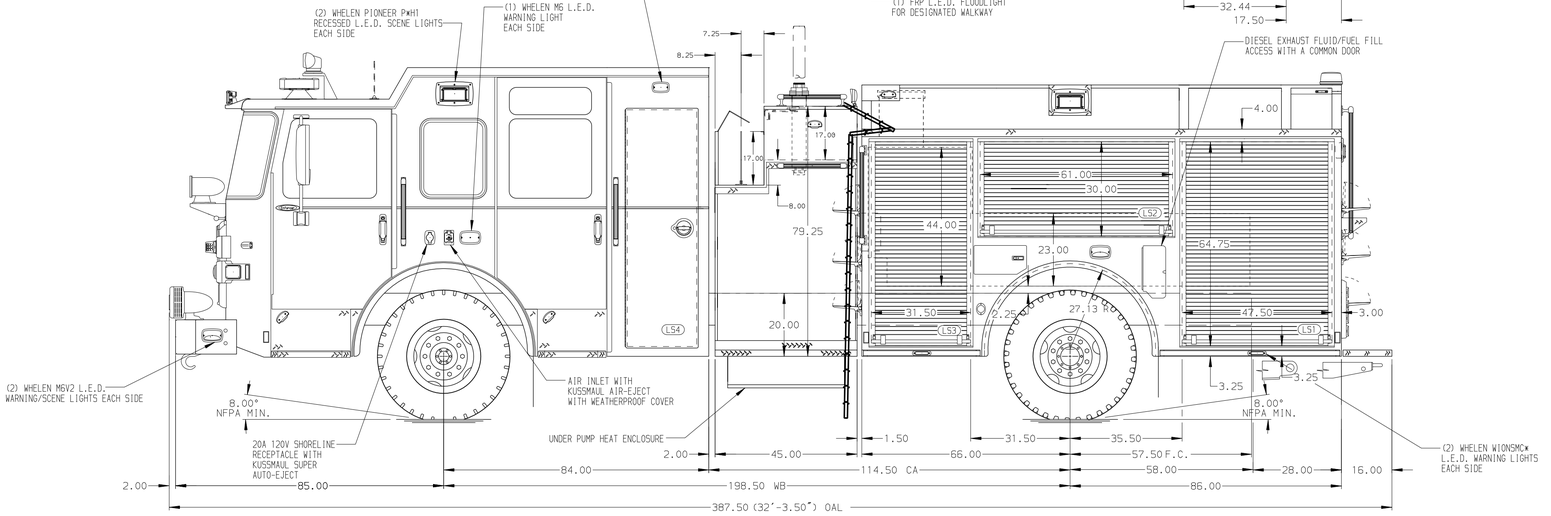

HOSEBED CAPACITIES

1. 200' OF 2.50" HOSE IN A POLY TRAY
2. 200' OF 2.00" HOSE IN A POLY TRAY
3. POLY TRAY STORAGE
4. 500' OF 2.50" HOSE
5. 500' OF 2.50" HOSE WYED TO 100' OF 1.75" HOSE
6. 700' OF 5.00" LDH HOSE

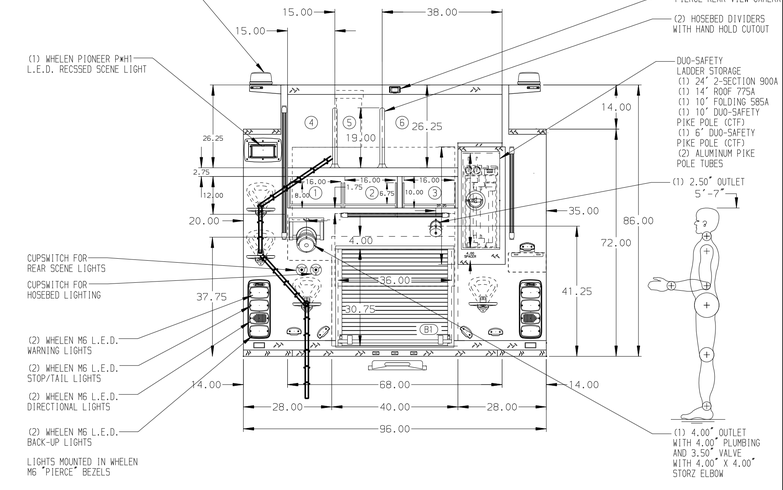

ALUMINUM BODY

SIDE ROLL & FRONTAL IMPACT PROTECTION

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

Pierce MANUFACTURING INC.

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. VOGEL LUBE SYSTEM PUMP IN THE PUMP HOUSE
2. BATTERY CHARGER LOCATED PER SHOP ORDER
3. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
4. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
5. EIGHT FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED PER SHOP ORDER
6. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER SHOP ORDER
7. PARTITION BETWEEN COMPARTMENTS LS1/B1 AND RS1/B1
8. SIX ALUMINUM PEGBOARDS MOUNTED PER SHOP ORDERS
9. ONE 120V DUPLEX RECEPTACLEIN THE CAB BEHIND THE OFFICER'S SEAT AND IN THE COMPARTMENT REAR OF THE CREW CAB
10. WHEEL CHOCKS AND BRACKETS TO BE PROVIDED BY THE FIRE DEPARTMENT
11. FOUR AIR BOTTLE STORAGE BINS LOCATED PER SHOP ORDER

REV	DATE	BY	CH
▽	-	-	-

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

TITLE: 1500-D-500 GAL POLY, 152" FH FDLER BODY LDRS. BTWN. TANK & SIDE SHEET, (2) X-LAYS, DELUGE
FOR: CITY OF EVANSTON FIRE DEPARTMENT EVANSTON, ILLINOIS
DWG NO.: 38054AD

JOB NO.	38054
SCALE	1:24
DATE	
DRAWN BY	JWO 17JAN23
CHECKED BY	EGO 19JAN23
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 20-JAN-2023 06:58:48