


BODY Pumper, HDRP, Aluminum COMPT, LEFT SIDE 189" RollUp Full Height & Depth Front & Rear COMPT, RIGHT SIDE 189" RollUp Full Height & Depth Front & Rear COMPT, REAR 29.50" FF RollUp Rear Compt w/Tailboard	WATER TANK 750 Gallon Poly Water Tank Foam System Husky 3 Single Agent Foam System Foam Cell 25 Gallon Foam Cell, Not Reduced Water
---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------

HOSEBED CAPACITY	
BED 1 1000' OF 5.00" D.J. POLY HOSE	BED 2 1000' OF 3.00" D.J. POLY HOSE

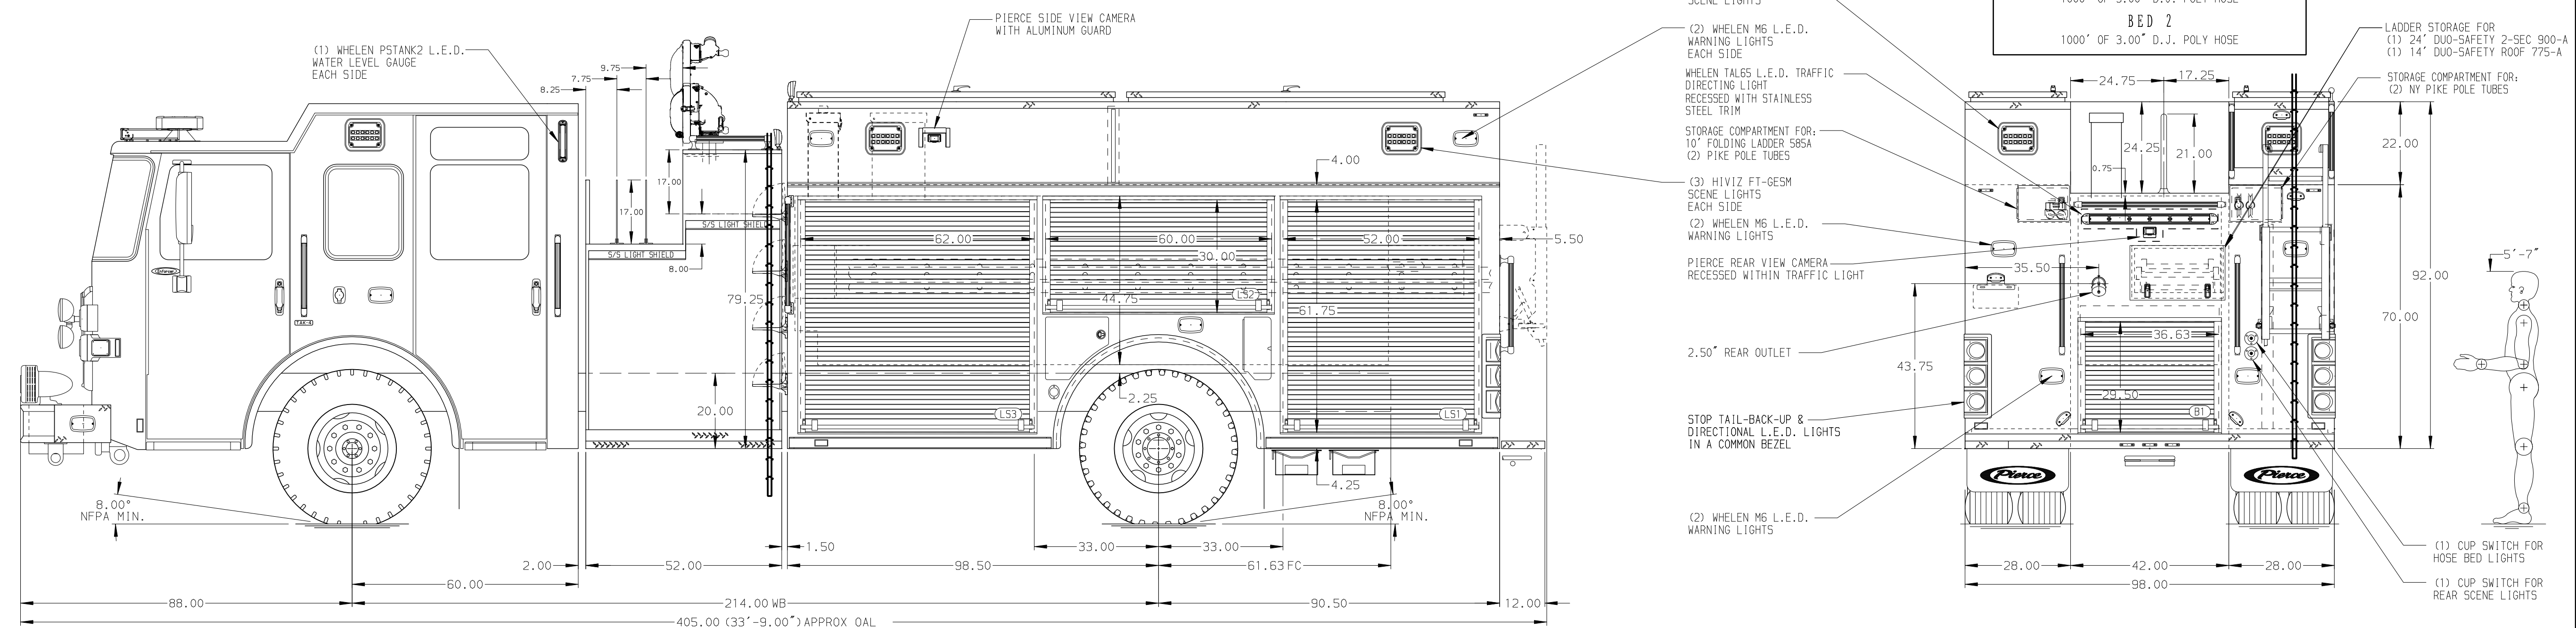

CHASSIS Enforcer Chassis ENGINE 500 HP Cummins X12 Engine	CAB 6010 Enforcer Cab BUMPER 19" Extended Stainless Steel	AXLE, FRONT, CUSTOM 19,500 Lb TAK-4 Axle AXLE, REAR 27,000 Lb Dana Axle	TRANSMISSION Allison 6th Gen, 4000 EVS P	PUMPHOUSE 52" Control Zone Side Mount PUMP 2000 GPM Waterous CSU	CROSSLAYS, 1.50" (2) 1.50" Standard Capacity CROSSLAYS, 2.50" (1) 2.50" Standard Capacity	SPEEDLAYS Speedlays Not Required GENERATOR Not Required	SAFETY Side Roll and Frontal Impact Protection
----------------------------------------------------------------------------------	----------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------	----------------------------------------------------	-----------------------------------------------------------------------------------------	------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------	-------------------------------------------------------------

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- ONE 1.50" OUTLET WITH 2.00" PIPING AND SWIVEL LOCATED IN CENTER BUMPER TRAY
- SHORELINE RECEPTACLE WITH KUSSMAUL SUPER AUTO-EJECT LOCATED ON DRIVER SIDE OF THE CAB
- AIR INLET/OUTLET WITH DISCONNECT COUPLING ON THE DRIVER SIDE PUMP PANEL
- BATTERY CHARGER LOCATED PER ORDER
- BATTERY CHARGE INDICATOR LOCATED ON THE DRIVER SIDE SEAT RISER

REV	DATE	BY	CH	ENFORCER
08FEB23	MMF	AST	MAKE	CHASSIS DATA
18JAN23	MMF	AST	PIERCE	TITLE
23DEC22	MMF	AST	MODEL	FOR
				DWG NO.

Pierce MANUFACTURING INC.		JOB NO.	38411
		SCALE	DATE
		1:24	
		DRAWN BY	15SEP22
		MMF	
		CHECKED BY	15SEP22
		COL	
		SHEET SIZE	SHEET NO.
		D	1 OF 2

Pierce Pumper Approval Drawing

City of Portland

38411AD-SH1