


BODY	WATER TANK
Pumper, HDRP, Aluminum	550 Gallon Poly Water Tank
COMPT, LEFT SIDE	Foam System
189" Lap Full Height & Depth Front & Rear	Husky 3 Single Agent Foam System
COMPT, RIGHT SIDE	Foam Cell
189" Lap Full Height & Depth Front & Rear	30 Gallon Foam Cell, Not Reduced Water
COMPT, REAR	
29.50" FF RollUp Rear Compt w/Tailboard	

HOSEBED CAPACITY	
BED 1	300' OF 3.00" D.J. POLY HOSE
BED 2	1000' OF 5.00" D.J. POLY HOSE
BED 3	300' OF 3.00" D.J. POLY HOSE

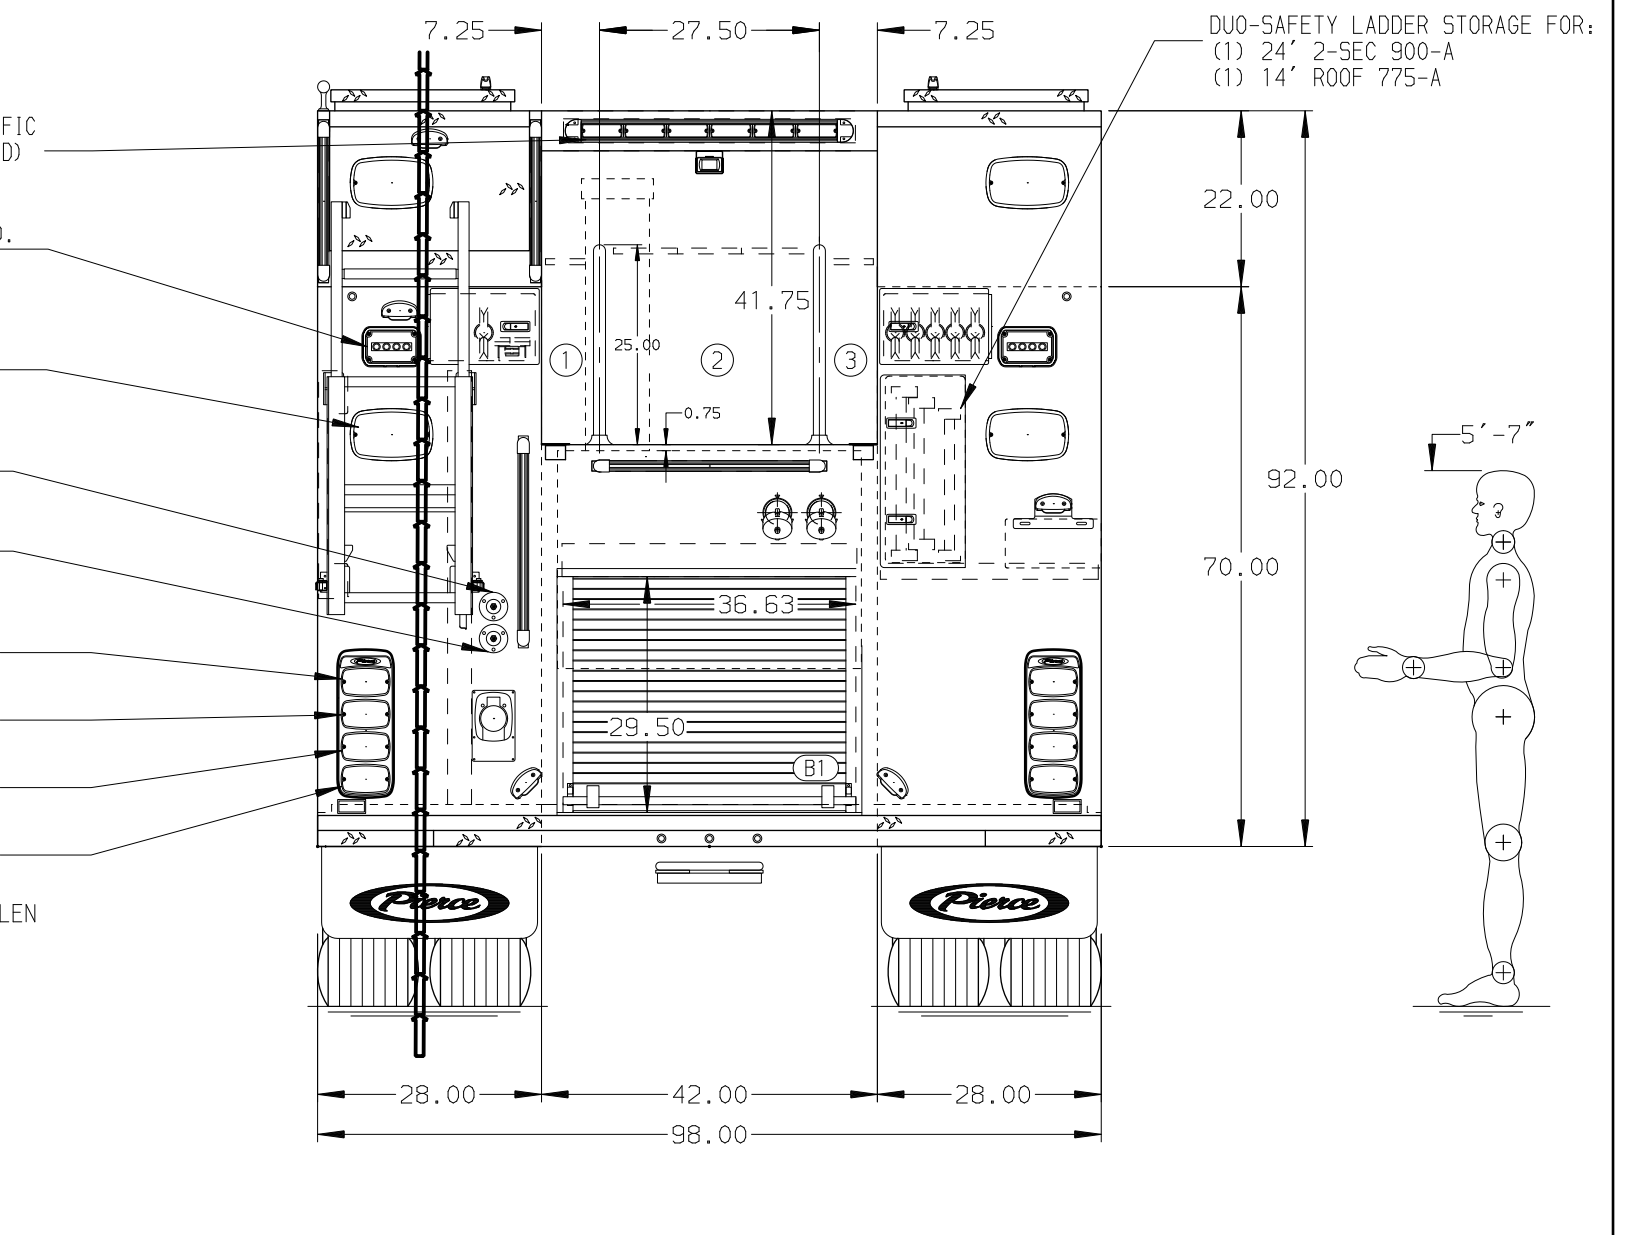

CHASSIS Enforcer Chassis ENGINE 510 HP Paccar MX13 Engine	CAB 7010 Enforcer Cab BUMPER 27" Extended Underslung	AXLE, FRONT, CUSTOM 19,500 Lb TAK-4 Axle AXLE, REAR 27,000 Lb Dana Axle	TRANSMISSION Allison 6th Gen, 4000 EV5 P	PUMPHOUSE 52" Control Zone Side Mount PUMP 2000 GPM Hale QMAX-200	CROSSLAYS, 1.50" (2) 1.50" Standard Capacity CROSSLAYS, 2.50" 2.50" Crosslay Not Required	SPEEDLAYS Speedlays Not Required GENERATOR Generator Not Required
--	---	--	--	--	--	--

NOTE
DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. MINOR DETAILS NOT SHOWN.

- TWO 1.50 OUTLETS WITH 2.00 PLUMBING LOCATED IN BUMPER CROSSLAYS
- ONE 30A SHORELINE RECEPTACLE WITH KISSMAIL SUPER AUTO-EJECT LOCATED PER SHOP ORDER
- AIR INLET/OUTLET WITH DISCONNECT COUPLING LOCATED PER SHOP ORDER
- BATTERY CHARGER LOCATED PER ORDER
- DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
- ANCHOR PLATE FOR NEDERMAN EXHAUST SYSTEM HOSE LOCATED PER SHOP ORDER
- PACCAR DEF TANK MOUNTED UNDER CAB ON THE DRIVER'S SIDE
- WHEEL CHOCKS AND MOUNTING PROVIDED BY FIRE DEPARTMENT

REV	DATE	BY	CH	ENFORCER
17JUN24	JJB	COS		CHASSIS DATA
11MAR24	JJB	CHR		MAKE
24JAN24	JJB	CHR		PIERCE
29NOV23	JJB	CHR		MODEL

Pierce MANUFACTURING INC.		JOB NO.	40877
TITLE		SCALE	DATE
Pierce HDRP Pumper Approval Drawing		1:24	23AUG23
FOR		CHECKED BY	23AUG23
Richardson Fire Department		MMF	
DWG NO.		SHEET SIZE	SHEET NO.
40877AD-SH1		D	1 OF 2