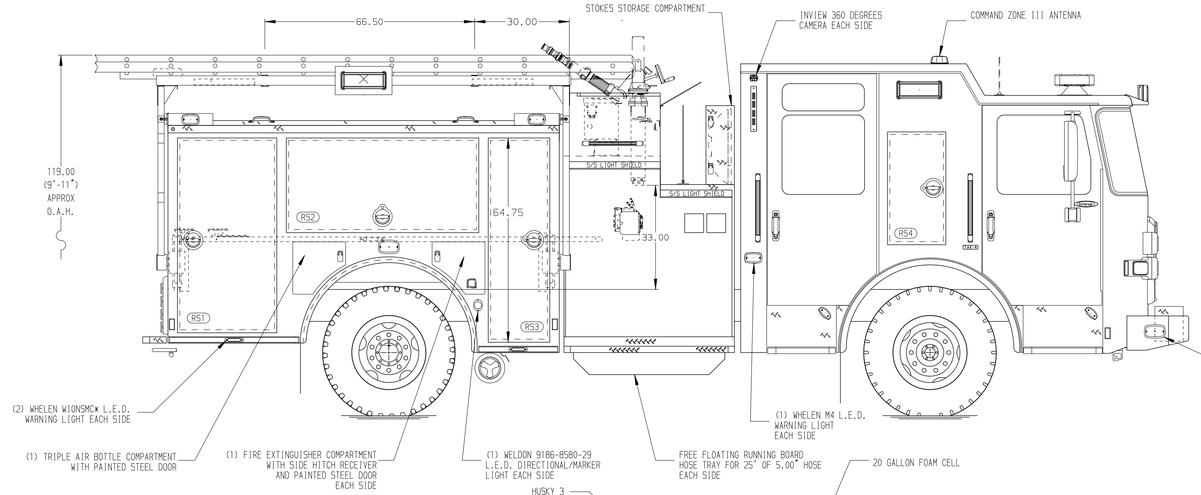

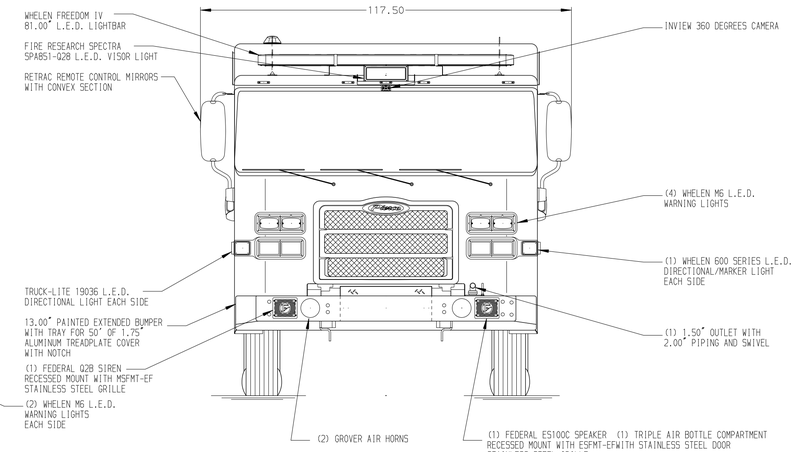

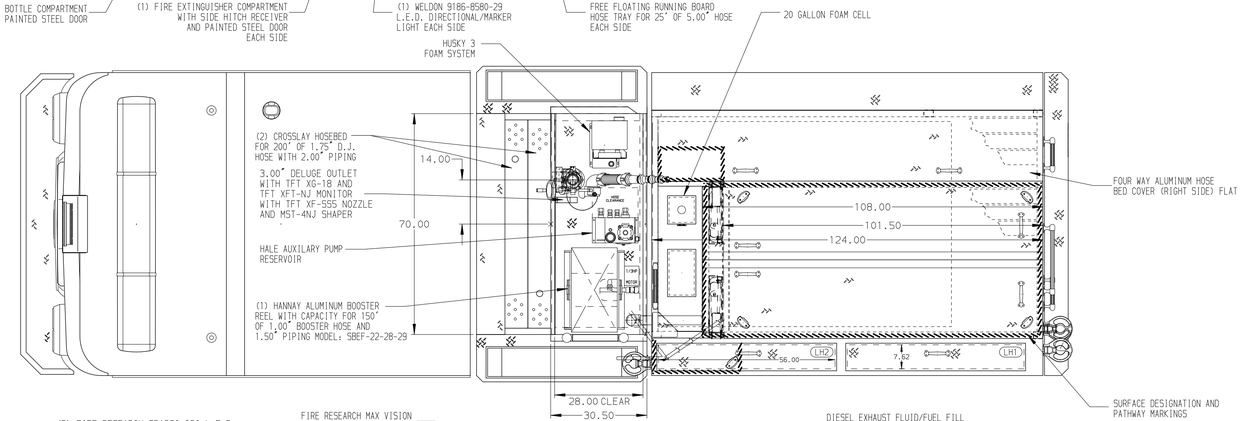

HOSEBED CAPACITIES

1. 200' OF 2.50" HOSE
2. 600' OF 3.00" HOSE
3. 800' OF 5.00" HOSE
4. OPEN HOSE BED

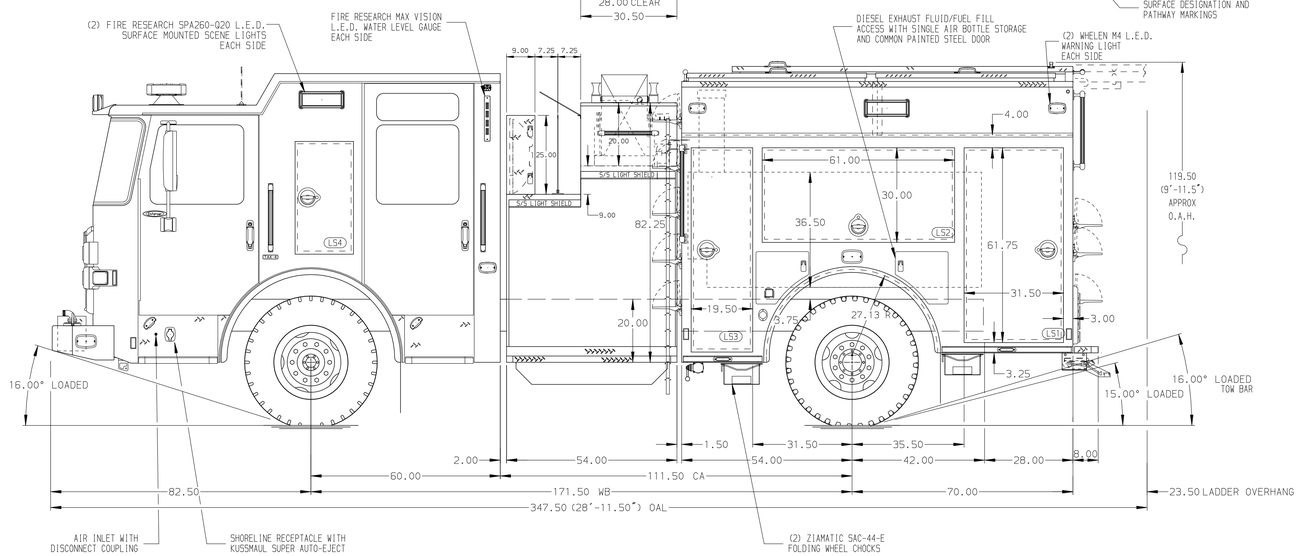

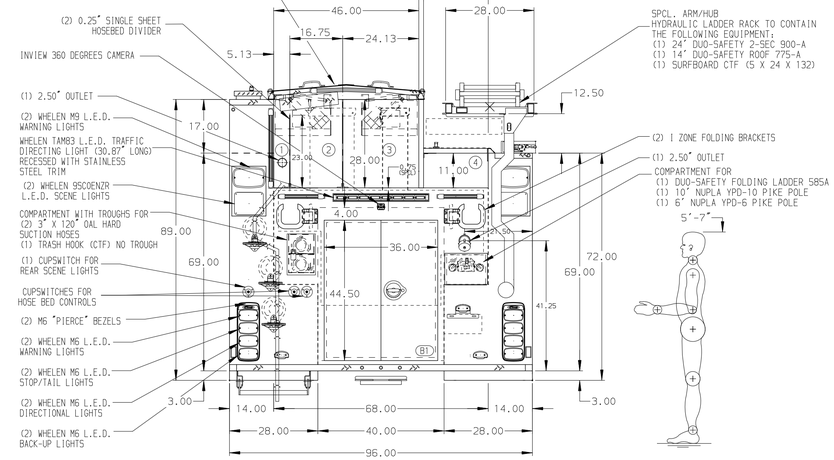

ALUMINUM BODY

MAXIMUM O.A.W. 118.00"

MAXIMUM O.A.L. 348.00"

MAXIMUM O.A.H. 120.00"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED IN EMS CABINET
2. BATTERY CHARGER INDICATOR LOCATED ON DRIVER'S SEAT RISER
3. ONE FULL WIDTH/DEPTH ADJUSTABLE SHELF IN COMPARTMENT; B1
4. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT; B1
5. DRAIN HOLE WITH SPLASH GUARD LOCATED IN EACH COMPARTMENT FLOOR
6. PAC TRAC ON SIDE WALL OF COMPARTMENT; B1
7. PARTITION BETWEEN COMPARTMENTS LS1/B1 AND RS1/B1
8. HUSKEY 3 FOAM SYSTEM
9. HALE CBP AUXILARY PUMP MOUNTED IN PUMP HOUSE
10. VERTICAL PARTITION IN COMPARTMENTS LS2 AND RS2

REV	DATE	BY	CH
V	05NOV21	JUS	CHR
V	27OCT21	JUS	COS
V	25JUN21	JUS	CHR
V	18MAY21	JUS	CHR
V	05MAR21	JUS	WKL

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: 1500-D-600P, 580 GAL OF WATER W/ 20 GAL FOAM CELL
124" BODY, HYD LDR RACK, (2) CROSSLAYS, HYD AUX PUMP

FOR: CYPRESS FIRE PROTECTION DISTRICT
MONTEREY, CALIFORNIA

DWG NO. 36014AD

JOB NO.	36014
SCALE 1:24	DATE
DRAWN BY JUS	03MAR21
CHECKED BY WKL	3MAR21
SHEET SIZE D	SHEET NO. 1 OF 1

View File Created 03-JAN-2022 08:15:11