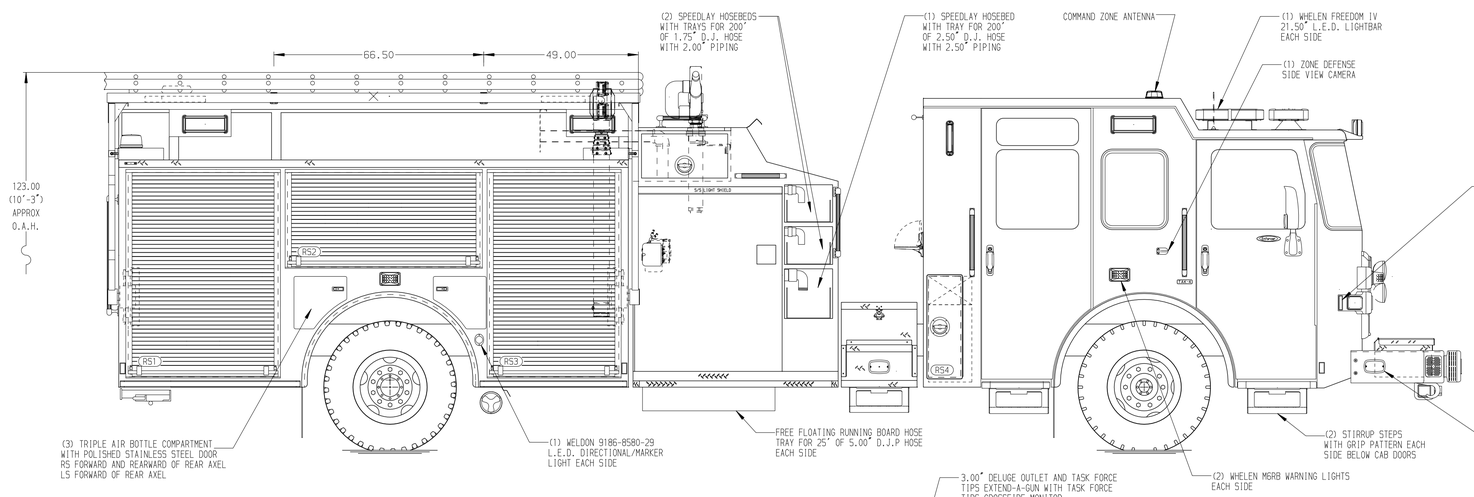

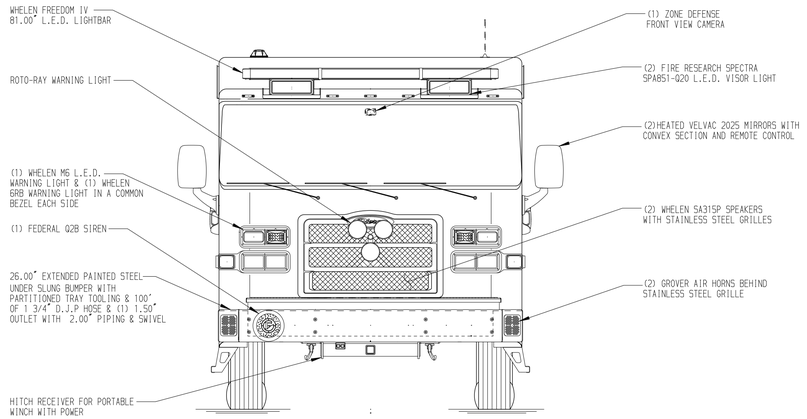

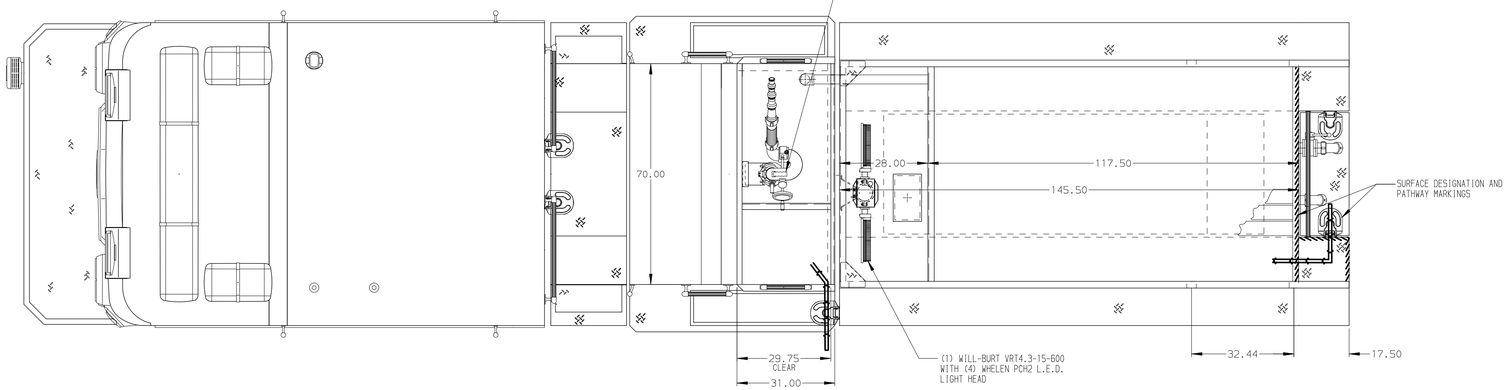

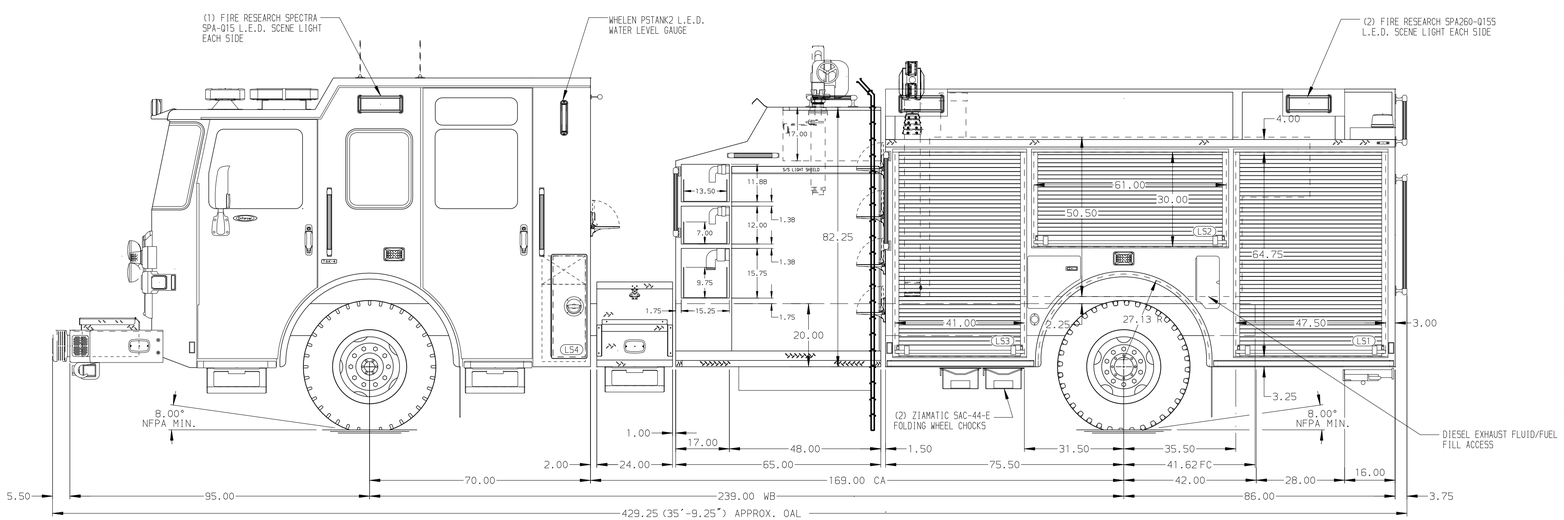

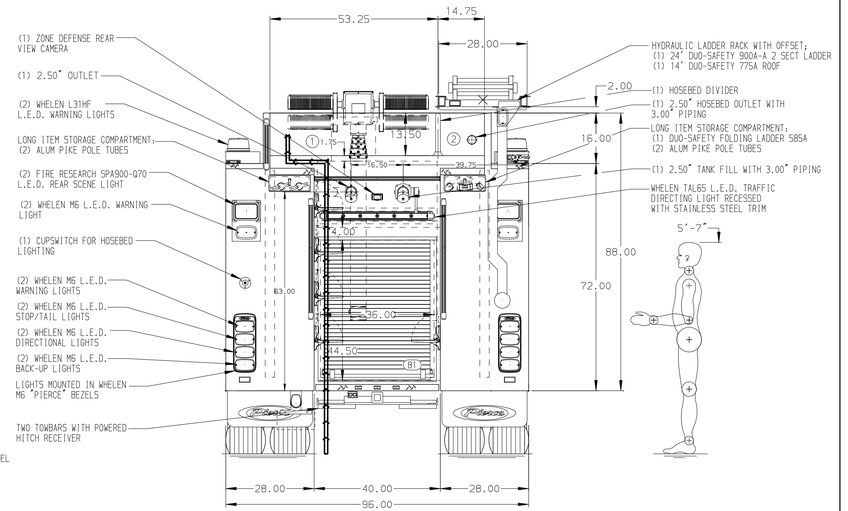

ALUMINUM BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
2. BATTERY CHARGER INDICATOR ON DRIVER'S SEAT RISER
3. SHORELINE RECEPTACLE LOCATED ON DRIVER SIDE STEP WELL
4. DUAL L.E.D. LIGHT STRIPS LOCATED IN HOSE BED
5. QTY OF (2) DRIP PAN GUARDS FOR ROLL-UP DOORS LOCATED PER OPTION LIST
6. QTY OF (2) FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED PER OPTION LIST
7. QTY OF (2) 2" SIDED FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER OPTION LIST
8. PARTITION BETWEEN COMPARTMENTS LS1/B1 AND RS1/B1
9. QTY OF (1) CIRCUIT BREAKER PANEL PER SHOP ORDER
10. QTY OF (1) AJUSTABLE SHELF WITH DOWN TURNED FLANGES LOCATED PER OPTION LIST
11. QTY OF (3) 2" SIDED ADJUSTABLE TRAYS LOCATED PER OPTION LIST
12. QTY OF (4) 30 DEGREE TILT/SLIDE OUT ADJUSTABLE TRAYS LOCATED PER OPTION LIST
13. QTY OF (2) SPECIAL HEIGHT FLOOR MOUNTED SLIDE OUT TRAYS LOCATED PER OPTION LIST
14. QTY OF (1) FLOOR MOUNTED ALUM PLATE FLAT TOP TRAY LOCATED PER OPTION LIST
15. QTY OF (1) FOUR DRAWER C-TECH ASSEMBLY LOCATED PER OPTION LIST
16. QTY OF (2) SWING OUT TOOLBOARDS LOCATED PER OPTION LIST
17. QTY OF (3) SLIDE OUT TOOLBOARDS LOCATED PER OPTION LIST
18. QTY OF (4) VERTICAL PEGBOARD PARTITIONS LOCATED PER OPTION LIST
19. QTY OF (9) POLY TOOL BOXES LOCATED PER OPTION LIST
20. TURTLE TILE MATTING REQUIRED IN LOCATIONS AS PER OPTION LIST

HOSEBED CAPACITIES
① 1200' OF 4.00" D.J. POLY HOSE
② 400' OF 2.50" D.J. POLY HOSE

REV	DATE	BY	CH
▽	29NOV21	JRC	DTJ
▽	19OCT21	JRC	DTJ
▽	28JUN21	JRC	PHA

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: 1500-D-750 GAL WATER TANK,161" FH FD BODY HYDRAULIC LADDER RACK, (3) SPEEDLAYS, DELUGE
FOR: WHITE SPRINGS FIRE ASSOCIATION GENEVA, NEW YORK
DWG NO. 36313AD

JOB NO.	36313
SCALE	1:24
DATE	
DRAWN BY	JRC
DATE	03JUN21
CHECKED BY	PHA
DATE	22JUN21
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 29-NOV-2021 14:41:14