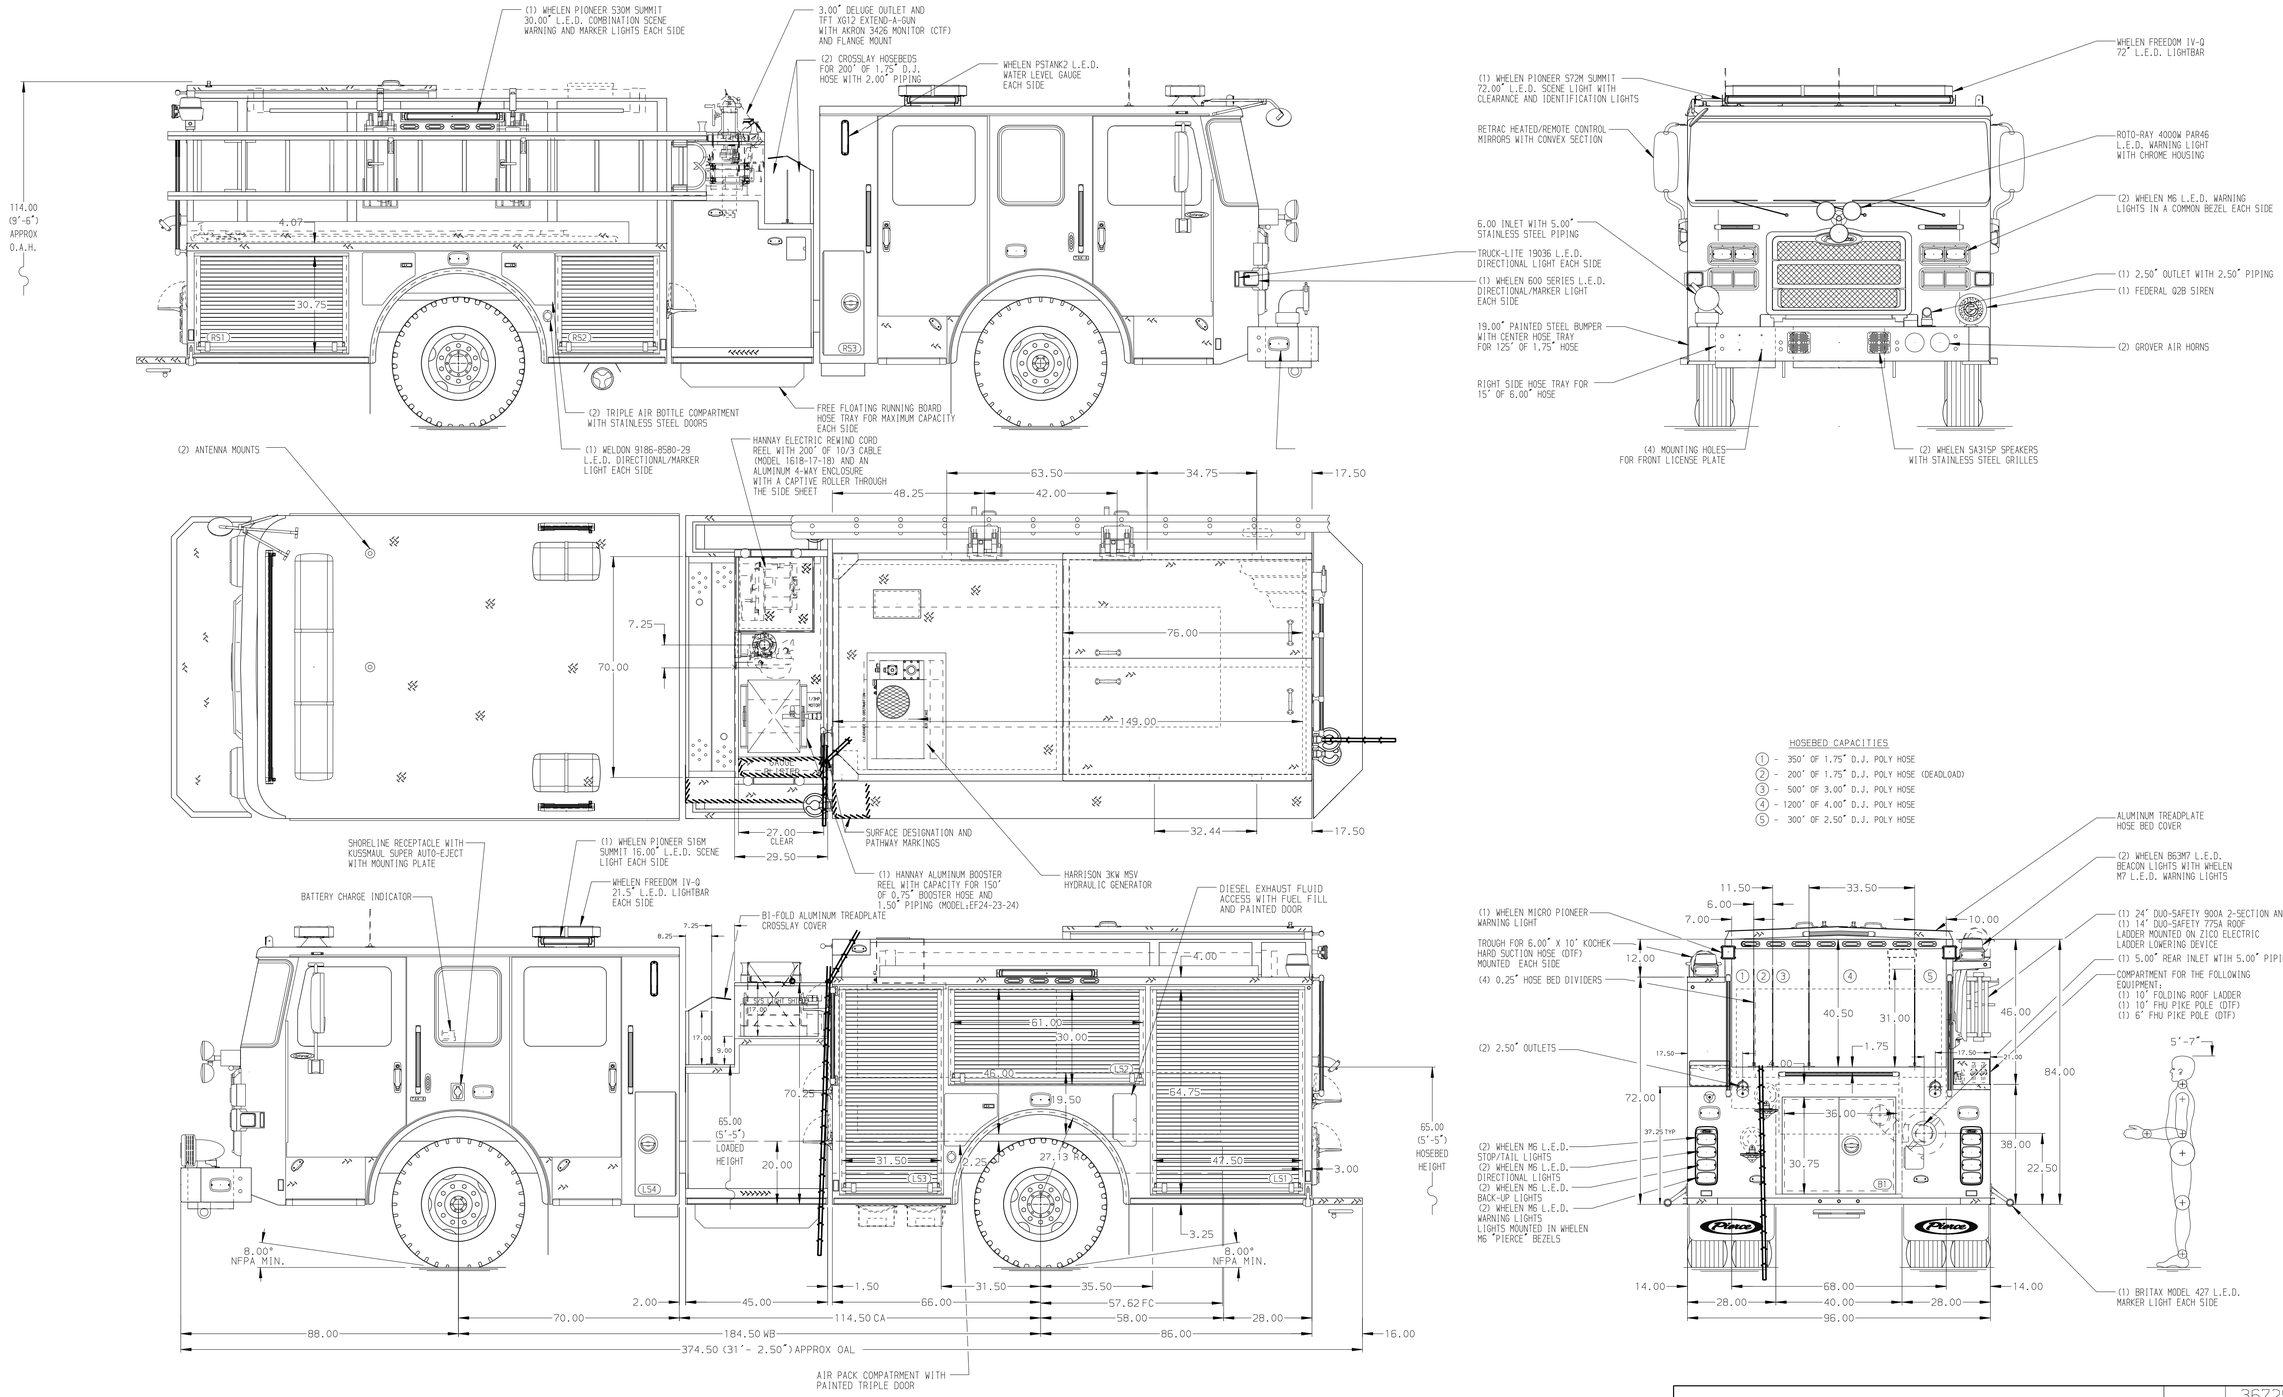

ALUMINUM BODY

MAXIMUM O.A.H. 123.50"

SIDE ROLL AND FRONTAL IMPACT PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ONSPOT AUTOMATIC TIRE CHAINS TO BE PROVIDED AT REAR
2. ALUMINUM 4-WAY ON CAB ROOF
3. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
4. FIVE DRIP PAN GUARDS FOR ROLL-P DOORS LOCATED PER ORDER
5. FOUR FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED PER ORDER
6. TWO ADJUSTABLE SLIDE-OUT TRAYS LOCATED PER ORDER
7. FOUR FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED PER ORDER
8. PAC TRAC ON BACK WALL LOCATED PER ORDER
9. PARTITION BETWEEN COMPARTMENTS LS1/B1 AND RS1/B1
10. RECESSED SWITCH COMPARTMENT FOR ZICO LADDER RACK LOCATED PER ORDER
11. CIRCUIT BREAKER PANEL LOCATED PER ORDER
12. THREE 120V DUPLEX RECEPTACLES LOCATED PER ORDER
13. AIR INLET/OUTLET WITH DISCONNECT FITTING LOCATED PER ORDER

REV	DATE	BY	CH
V	12JAN22	KLE	CSH
V	15NOV21	CDU	CZA
V	11NOV21	CDU	CZA

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: 2000-D-750P, 750 GAL WATER, 152" FDLER PUMPER BODY LADDERS ON RS ZICO RACK, (2) CROSSLAYS, DELUGE
FOR: COUNTY OF HANOVER, HANOVER, VIRGINIA
DWG NO.: 36729AD

JOB NO.	36729 01-03
SCALE	1:24
DATE	
DRAWN BY	KLE 03NOV21
CHECKED BY	CDU 03NOV21
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 13-JAN-2022 07:11:44