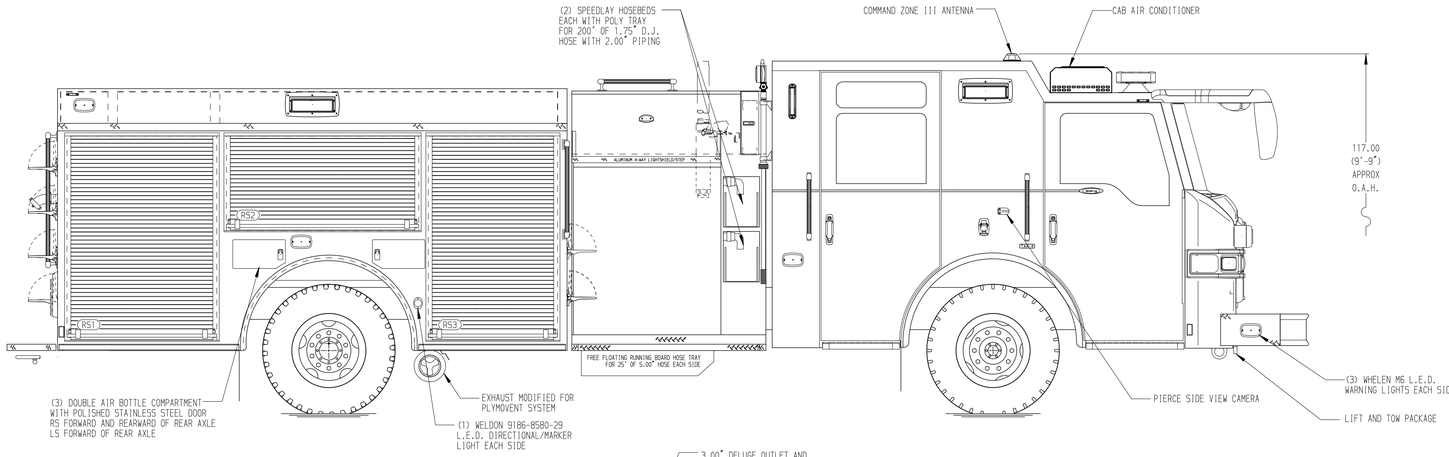

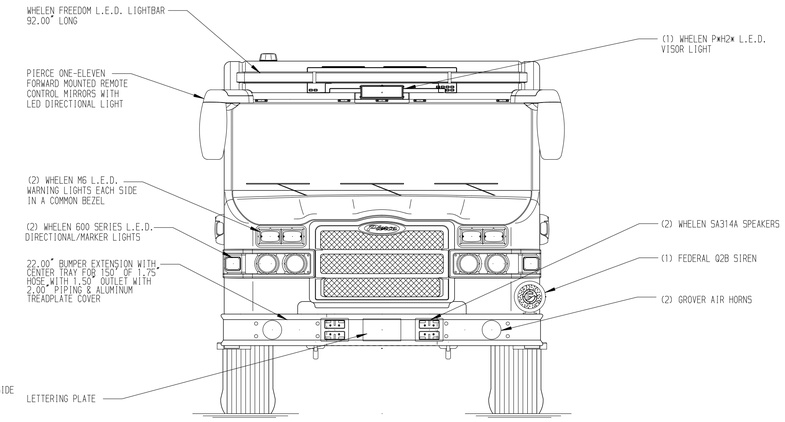

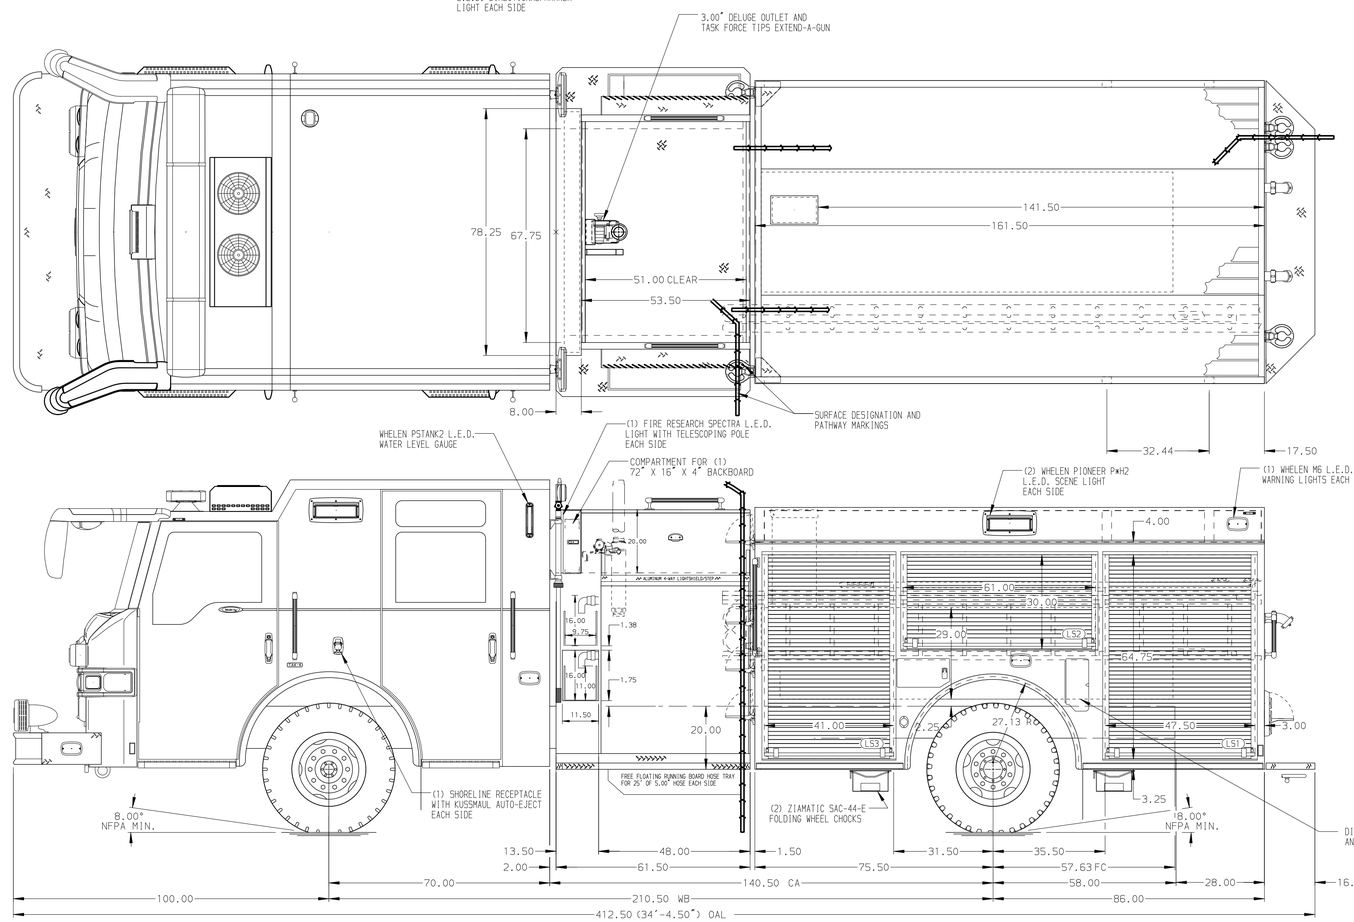

HOSE BED CAPACITIES

1. 300' OF 3.00" D.J. POLY HOSE
2. 300' OF 3.00" D.J. POLY HOSE
3. 1000' OF 5.00" L.D. HOSE
4. 200' OF 2.50" D.J. POLY HOSE
5. 200' OF 2.50" D.J. POLY HOSE
6. OPEN FOR STORAGE

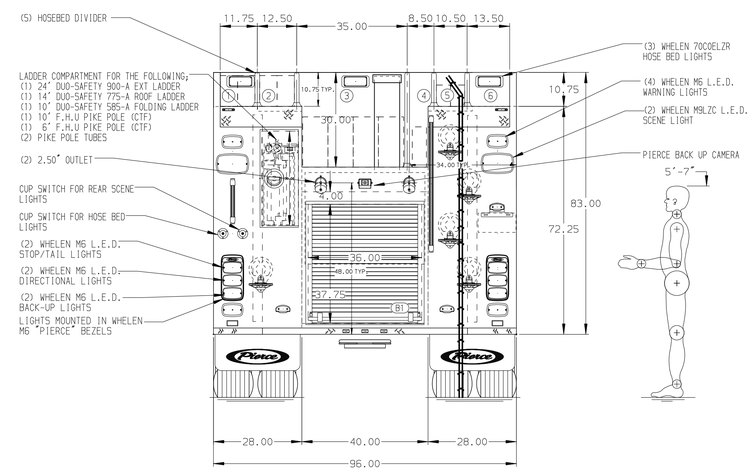

ALUMINUM BODY

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

Pierce MANUFACTURING INC.

JOB NO.	36971
SCALE	1:24
DATE	
DRAWN BY	JRC 25JAN22
CHECKED BY	EGO 24JAN22
SHEET SIZE	D
SHEET NO.	1 OF 1

TITLE: 1500-D-500P, 161" FULL HEIGHT FULL DEPTH BODU (2) SPEED LAYS, LS BODY LADDER STORAGE, DELUGE

FOR: CITY OF SAFETY HARBOR SAFETY HARBOR, FLORIDA

CHASSIS DATA

MAKE: PIERCE

MODEL: VELOCITY

DWG NO. 36971AD

REV	DATE	BY	CH
-	-	-	-

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET WITH DISCONNECT COUPLING LOCATED ON LEFT PUMP PANEL
2. AIR OUTLET WITH WITH SHUT OFF VALVE LOCATED ON LEFT PUMP PANEL
3. MOUNTING PROVISIONS FOR FUTURE HYDRAULIC REEL INSTALLATION LOCATED PER OPTION LIST
4. NINE FULL WIDTH/DEPTH ADJUSTABLE SHELVES IN COMPARTMENTS PER OPTION LIST
5. THREE ADJUSTABLE TILTING SLIDE-OUT TRAYS IN COMPARTMENTS PER OPTION LIST
6. THREE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENTS PER OPTION LIST
7. ONE SWING-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENTS PER OPTION LIST
8. SLIDE-OUT TOOL BOARD WITH PEGBOARD PATTERN IN COMPARTMENTS PER OPTION LIST
9. ONE VERTICAL PEGBOARD PARTITION IN COMPARTMENTS PER OPTION LIST
10. VANNER LIFE STAR INVERTER/BATTERY CHARGER LOCATED PER OPTION LIST
11. ONE 120V DUPLEX RECEPTACLE LOCATED PER OPTION LIST

View File Created 26-JAN-2022 07:21:46