RIGHT SIDE COMPARTMENTS CONTAIN THE FOLLOWING:

COMPARTMENT RS1 CONTAINS:
- (2) 22"DP ADJ SHELVES
- (1) 22"DP ADJ SLIDE OUT/TILT TRAY
- (1) 15/20A,120V DUPLEX RECEPTACLE
-
-
-
-

COMPARTMENT RS2 CONTAINS:
- (2) 2-WAY ADJ SLIDE OUT TOOLBOARDS
- (1) RACK FOR 4 6000 UN AIR BOTTLES
-
-

COMPARTMENT RS3 CONTAINS:
- (1) 2-WAY ADJ SLIDE OUT TRAY WITH 62"DP TOOLBOARD
- (1) ELECTRIC CORD REEL WITH 200' OF 10/3 YELLOW CORD
- (1) 15/20A,120V DUPLEX RECEPTACLE
-
-
-

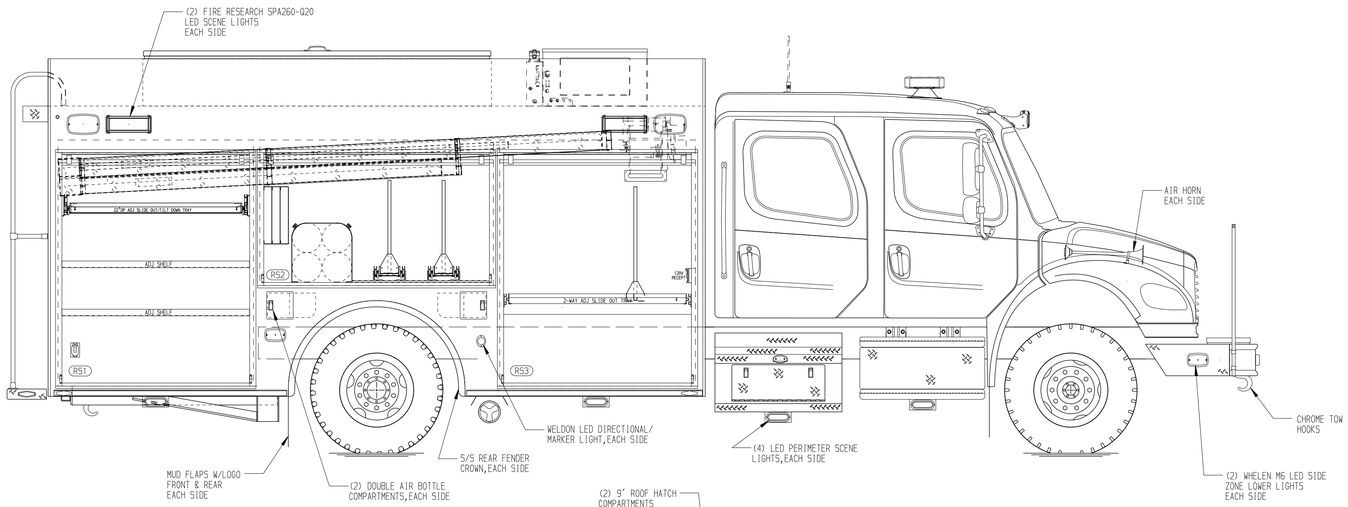

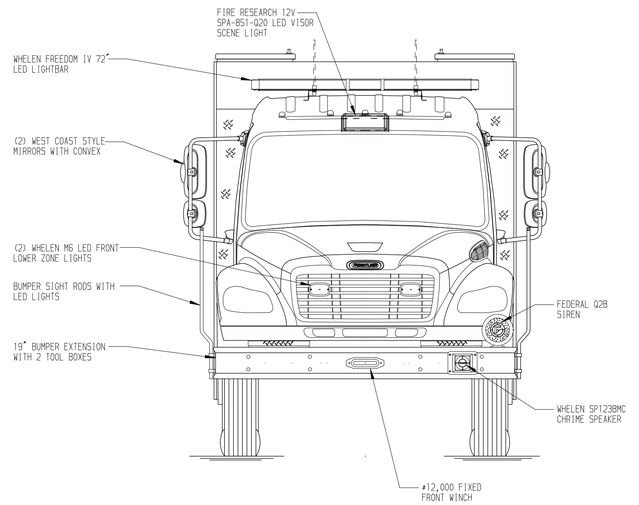

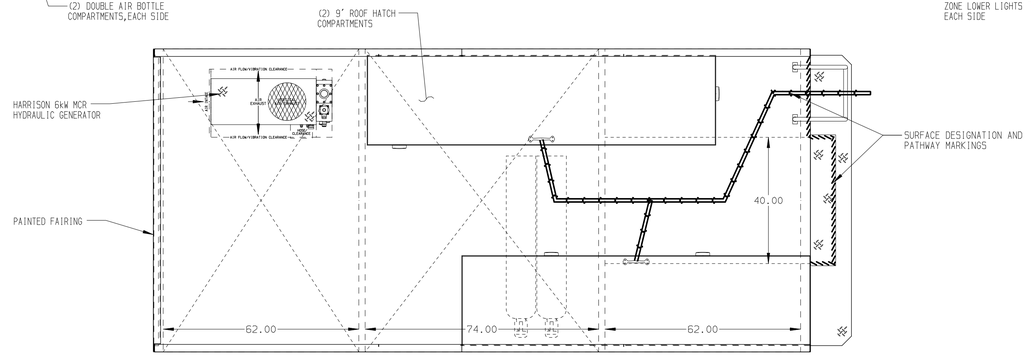

REAR COMPARTMENT CONTAINS THE FOLLOWING:

COMPARTMENT B1 CONTAINS:
- (1) 60"DP ADJ SHELF
- (1) 52"DP ADJ SLIDE OUT/TILT TRAY
- (1) 62"DP FLOOR MTD SLIDE OUT TRAY
- (1) RACK FOR THE FOLLOWING:
  - (1) 24'2-SECTION LADDER
  - (1) 16'2-SECTION LADDER
  - (1) 10' FOLDING LADDER
  - (6) PIKE POLES
-
-
-
-
-

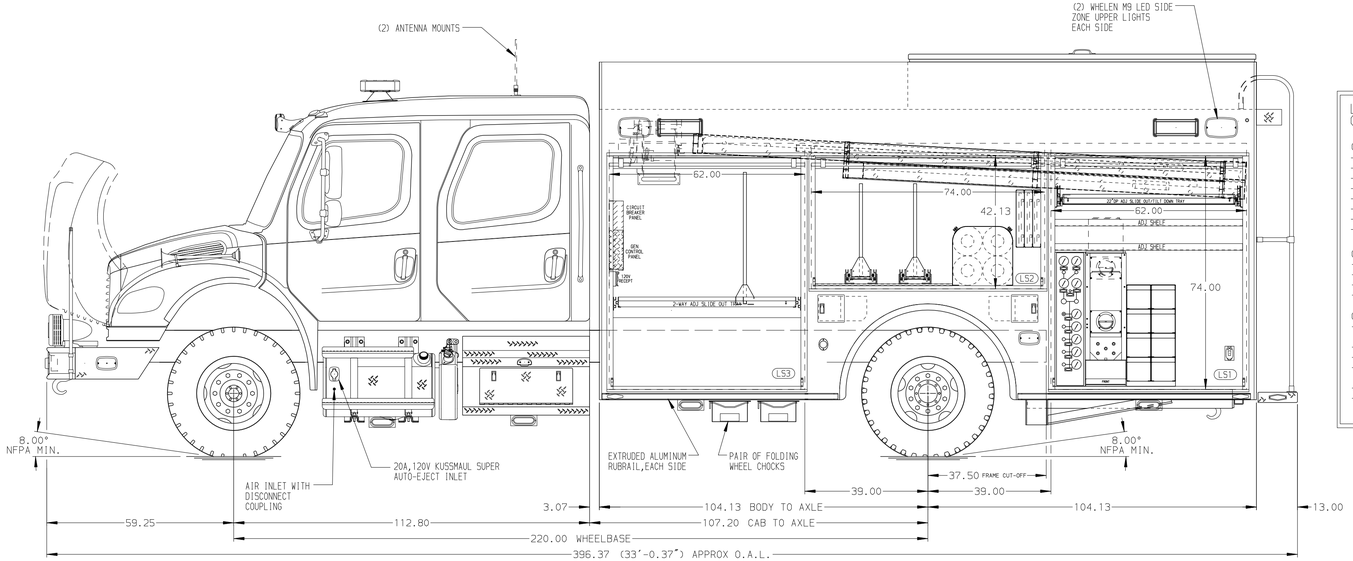

LEFT SIDE COMPARTMENTS CONTAIN THE FOLLOWING:

COMPARTMENT LS1 CONTAINS:
- (1) "SPACESAVER"2-BOTTLE FILL ENCLOSURE
- (1) CASCADE SYSTEM CONTROL PANEL
- (1) RACK FOR 8 SCBA BOTTLES
- (2) 22"DP ADJ SHELVES
- (1) 22"DP ADJ SLIDE OUT/TILT TRAY
- (1) 15/20A,120V DUPLEX RECEPTACLE
-
-

COMPARTMENT LS2 CONTAINS:
- (1) RACK FOR 3 BACKBOARDS
- (2) 2-WAY ADJ SLIDE OUT TOOLBOARDS
- (1) RACK FOR 4 6000 UN AIR BOTTLES
-

COMPARTMENT LS3 CONTAINS:
- (1) 2-WAY ADJ SLIDE OUT TRAY WITH 62"DP TOOLBOARD
- (1) CIRCUIT BREAKER PANEL
- (1) GENERATOR METER PANEL
- (1) ELECTRIC CORD REEL WITH 200' OF 10/3 YELLOW CORD
- (1) 15/20A,120V DUPLEX RECEPTACLE
-

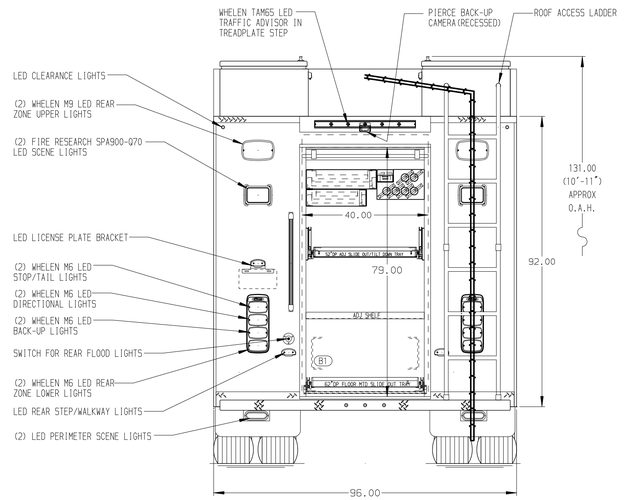

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

NOTES:
1. IOTA 75 AMP BATTERY CHARGER LOCATED IN THE CENTER OF LS3/RS3
2. BATTERY CHARGE INDICATOR LOCATED ON DRIVER'S SEAT RISER
3. ALUMINUM TREADPLATE ON FRONT SHEET OF BODY
4. PULL-STRAPS ON ALL BODY ROLL-UP DOORS
5. PIERCE LED STRIP LIGHTS IN ALL BODY ROLL-UP DOORS

CUSTOMER APPROVAL

APPROVED BY: _____

DATE: _____

REV	DATE	BY	CH
▽	-	-	-

CHASSIS DATA

MAKE: FREIGHTLINER

MODEL: M2-106

Pierce MANUFACTURING INC.

TITLE: ENCORE RESCUE VEHICLE 62.74.62

FOR: ASCENSION PARISH FIRE DISTRICT NO.1 BID #912 LARRY FREEMAN

DWG NO. 38064AD

JOB NO.	38064
SCALE	1:24
DATE	
DRAWN BY	DHE 08DEC22
CHECKED BY	CDK 16DEC22
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 16-DEC-2022 09:25:08