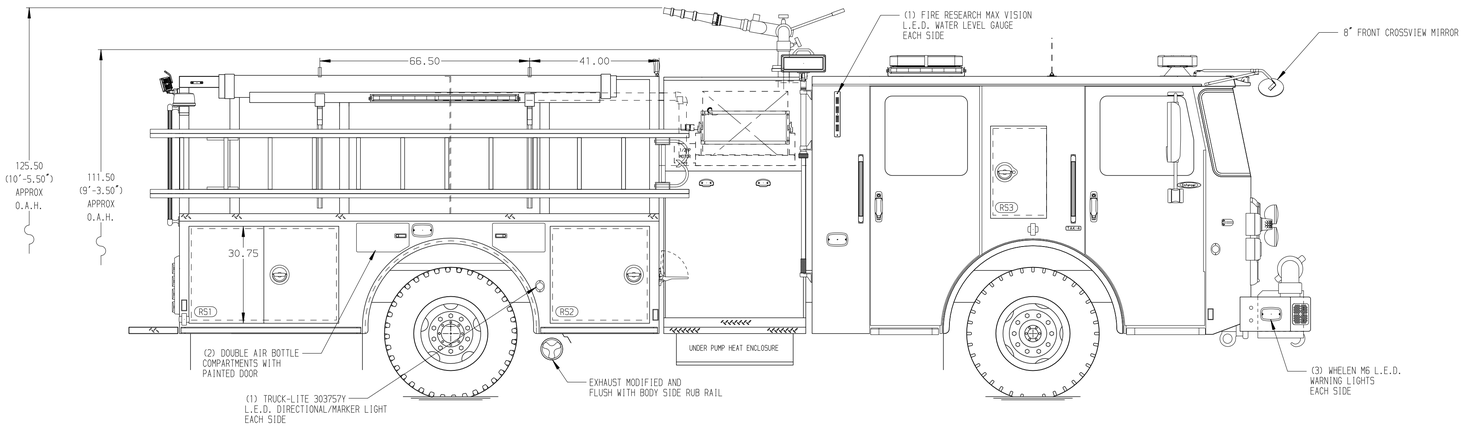

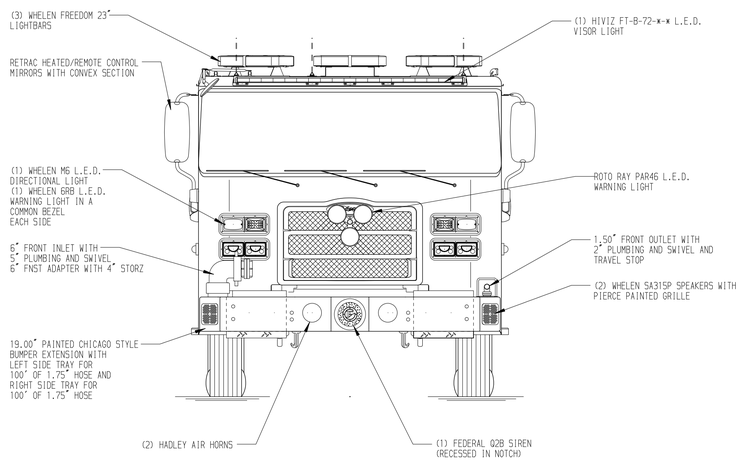

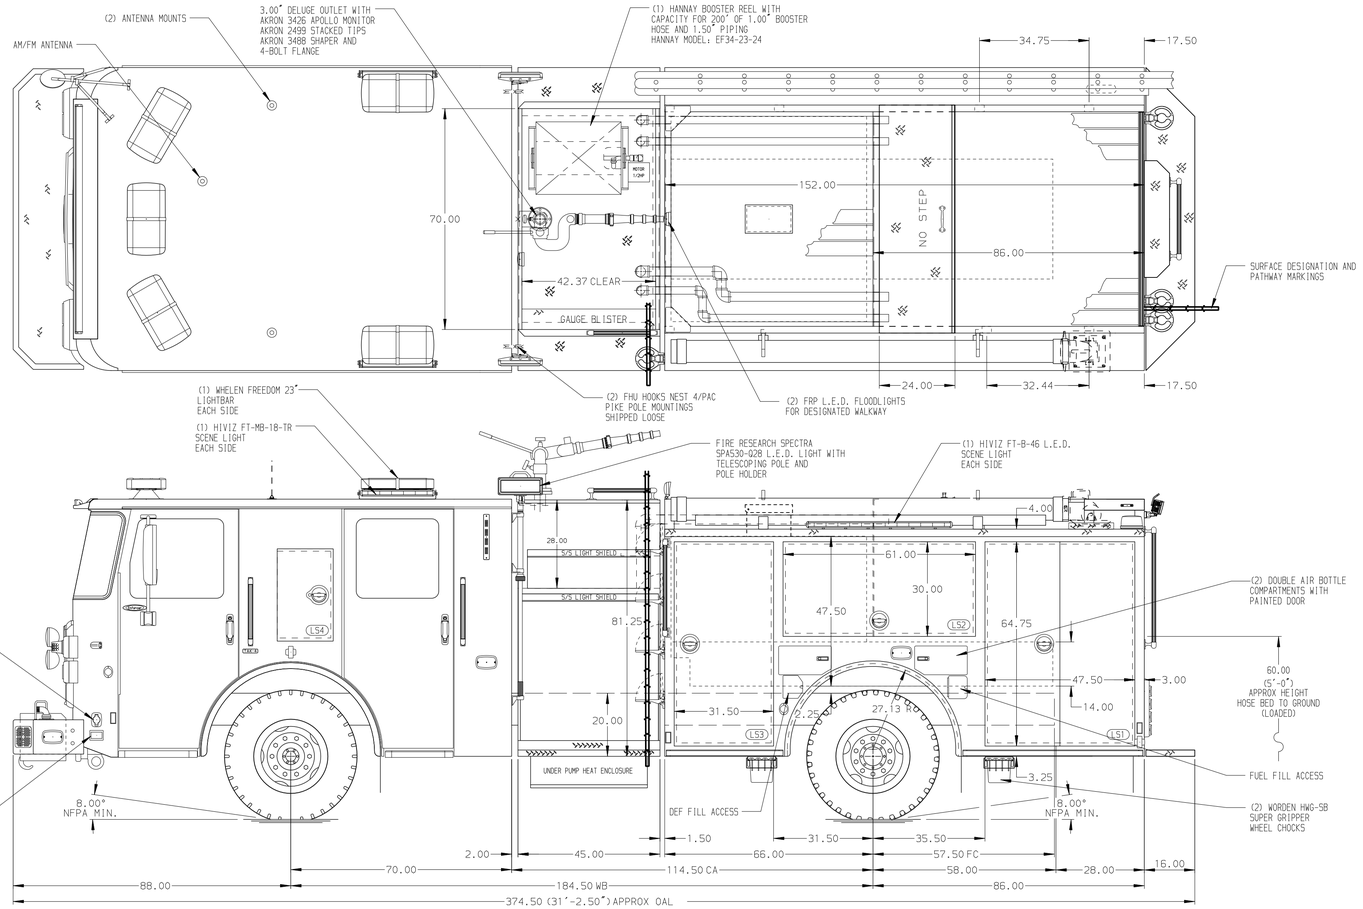

HOSEBED CAPACITIES

1. 200' OF 1.75" DJP HOSE
2. 200' OF 2.50" DJP HOSE
3. 600' OF 2.50" DJP HOSE
4. 1050' OF 4.00" DJP HOSE
5. 300' OF 1.75" DJP HOSE
6. 200' OF 1.75" DJP HOSE

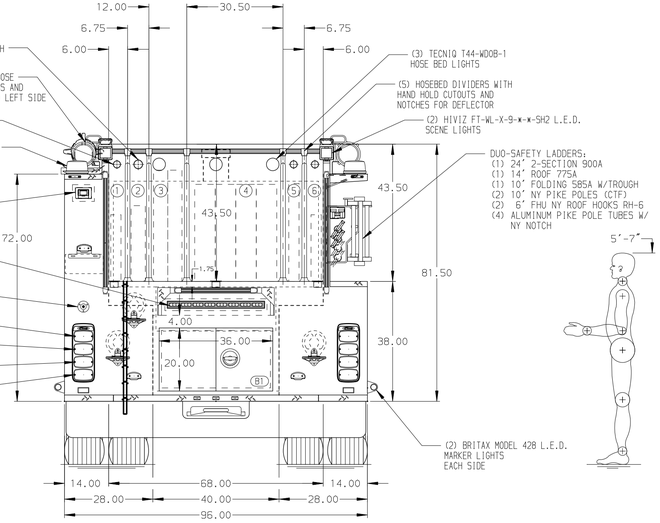

STAINLESS STEEL BODY

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. AIR INLET WITH DISCONNECT COUPLING IN THE DRIVER SIDE STEPWELL
2. SIX DUAL L.E.D. LIGHT STRIPS ON COMPARTMENT DOORS PER ORDER
3. ONE TECNIQ E-10-WOOO-1 L.E.D. LIGHT LOCATED IN CARGO AREA PER ORDER
4. FOUR FULL WIDTH/DEPTH ADJUSTABLE SHELVES LOCATED IN COMPARTMENTS PER ORDER
5. TWO FLOOR MOUNTED SLIDE-OUT TRAYS LOCATED IN COMPARTMENTS PER ORDER
6. ONE CTECH DRAWER ASSEMBLY LOCATED IN COMPARTMENT PER ORDER
7. ONE SWING-OUT TOOLBARD LOCATED IN COMPARTMENT PER ORDER
8. ONE PAC TRAC LOCATED ON WALLS OF COMPARTMENTS PER ORDER
9. STAINLESS STEEL SPLASH GUARDS LOCATED ON WHEEL WELLS PER ORDER
10. WATER HEATER LOCATED IN PUMP COMPARTMENT
11. XANTREX INVERTER LOCATED IN COMPARTMENT PER ORDER
12. SIX 120V DUPLEX RECEPTACLES LOCATED IN COMPARTMENTS PER ORDER

REV	DATE	BY	CH
V	16OCT23	SAM	DTJ
B	21AUG23	SAM	DTJ
V	16MAY23	SAM	CZA

CHASSIS DATA
MAKE: PIERCE
MODEL: ENFORCER

Pierce MANUFACTURING INC.

TITLE: 1500-D-750P, 750G WATER, 152" FDLER
LADDER RACK, BOOSTER REEL, DELUGE

FOR: SAYLOR TOWNSHIP FIRE DEPARTMENT
DES MOINES, IOWA

DWG NO. 38360AD

JOB NO.	38360
SCALE	1:24
DATE	
DRAWN BY	SAM 05MAY23
CHECKED BY	CZA 08MAY23
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 17-OCT-2023 08:35:19